


Unexpected Wonder

BZ LIME *stone*
NATURE IN HARMONY

From the skilful selection of different stones, with diverse origins and characteristics, a collection is created in which inspiring materials blend together to form hybrid surfaces, made unique by overlapping markings, shades and soft material effects. A new product, with a natural style but with a sophisticated spirit, which incorporates the appeal of natural materials with a language that speaks of harmonies, balanced contrasts and sophisticated textures.

Perfect for any design context, private or public, crossing the border between indoor and outdoor spaces, offering the possibility of designing new scenarios in interior projects that increasingly draw on the outdoors.

NATURAL
MOMENTS

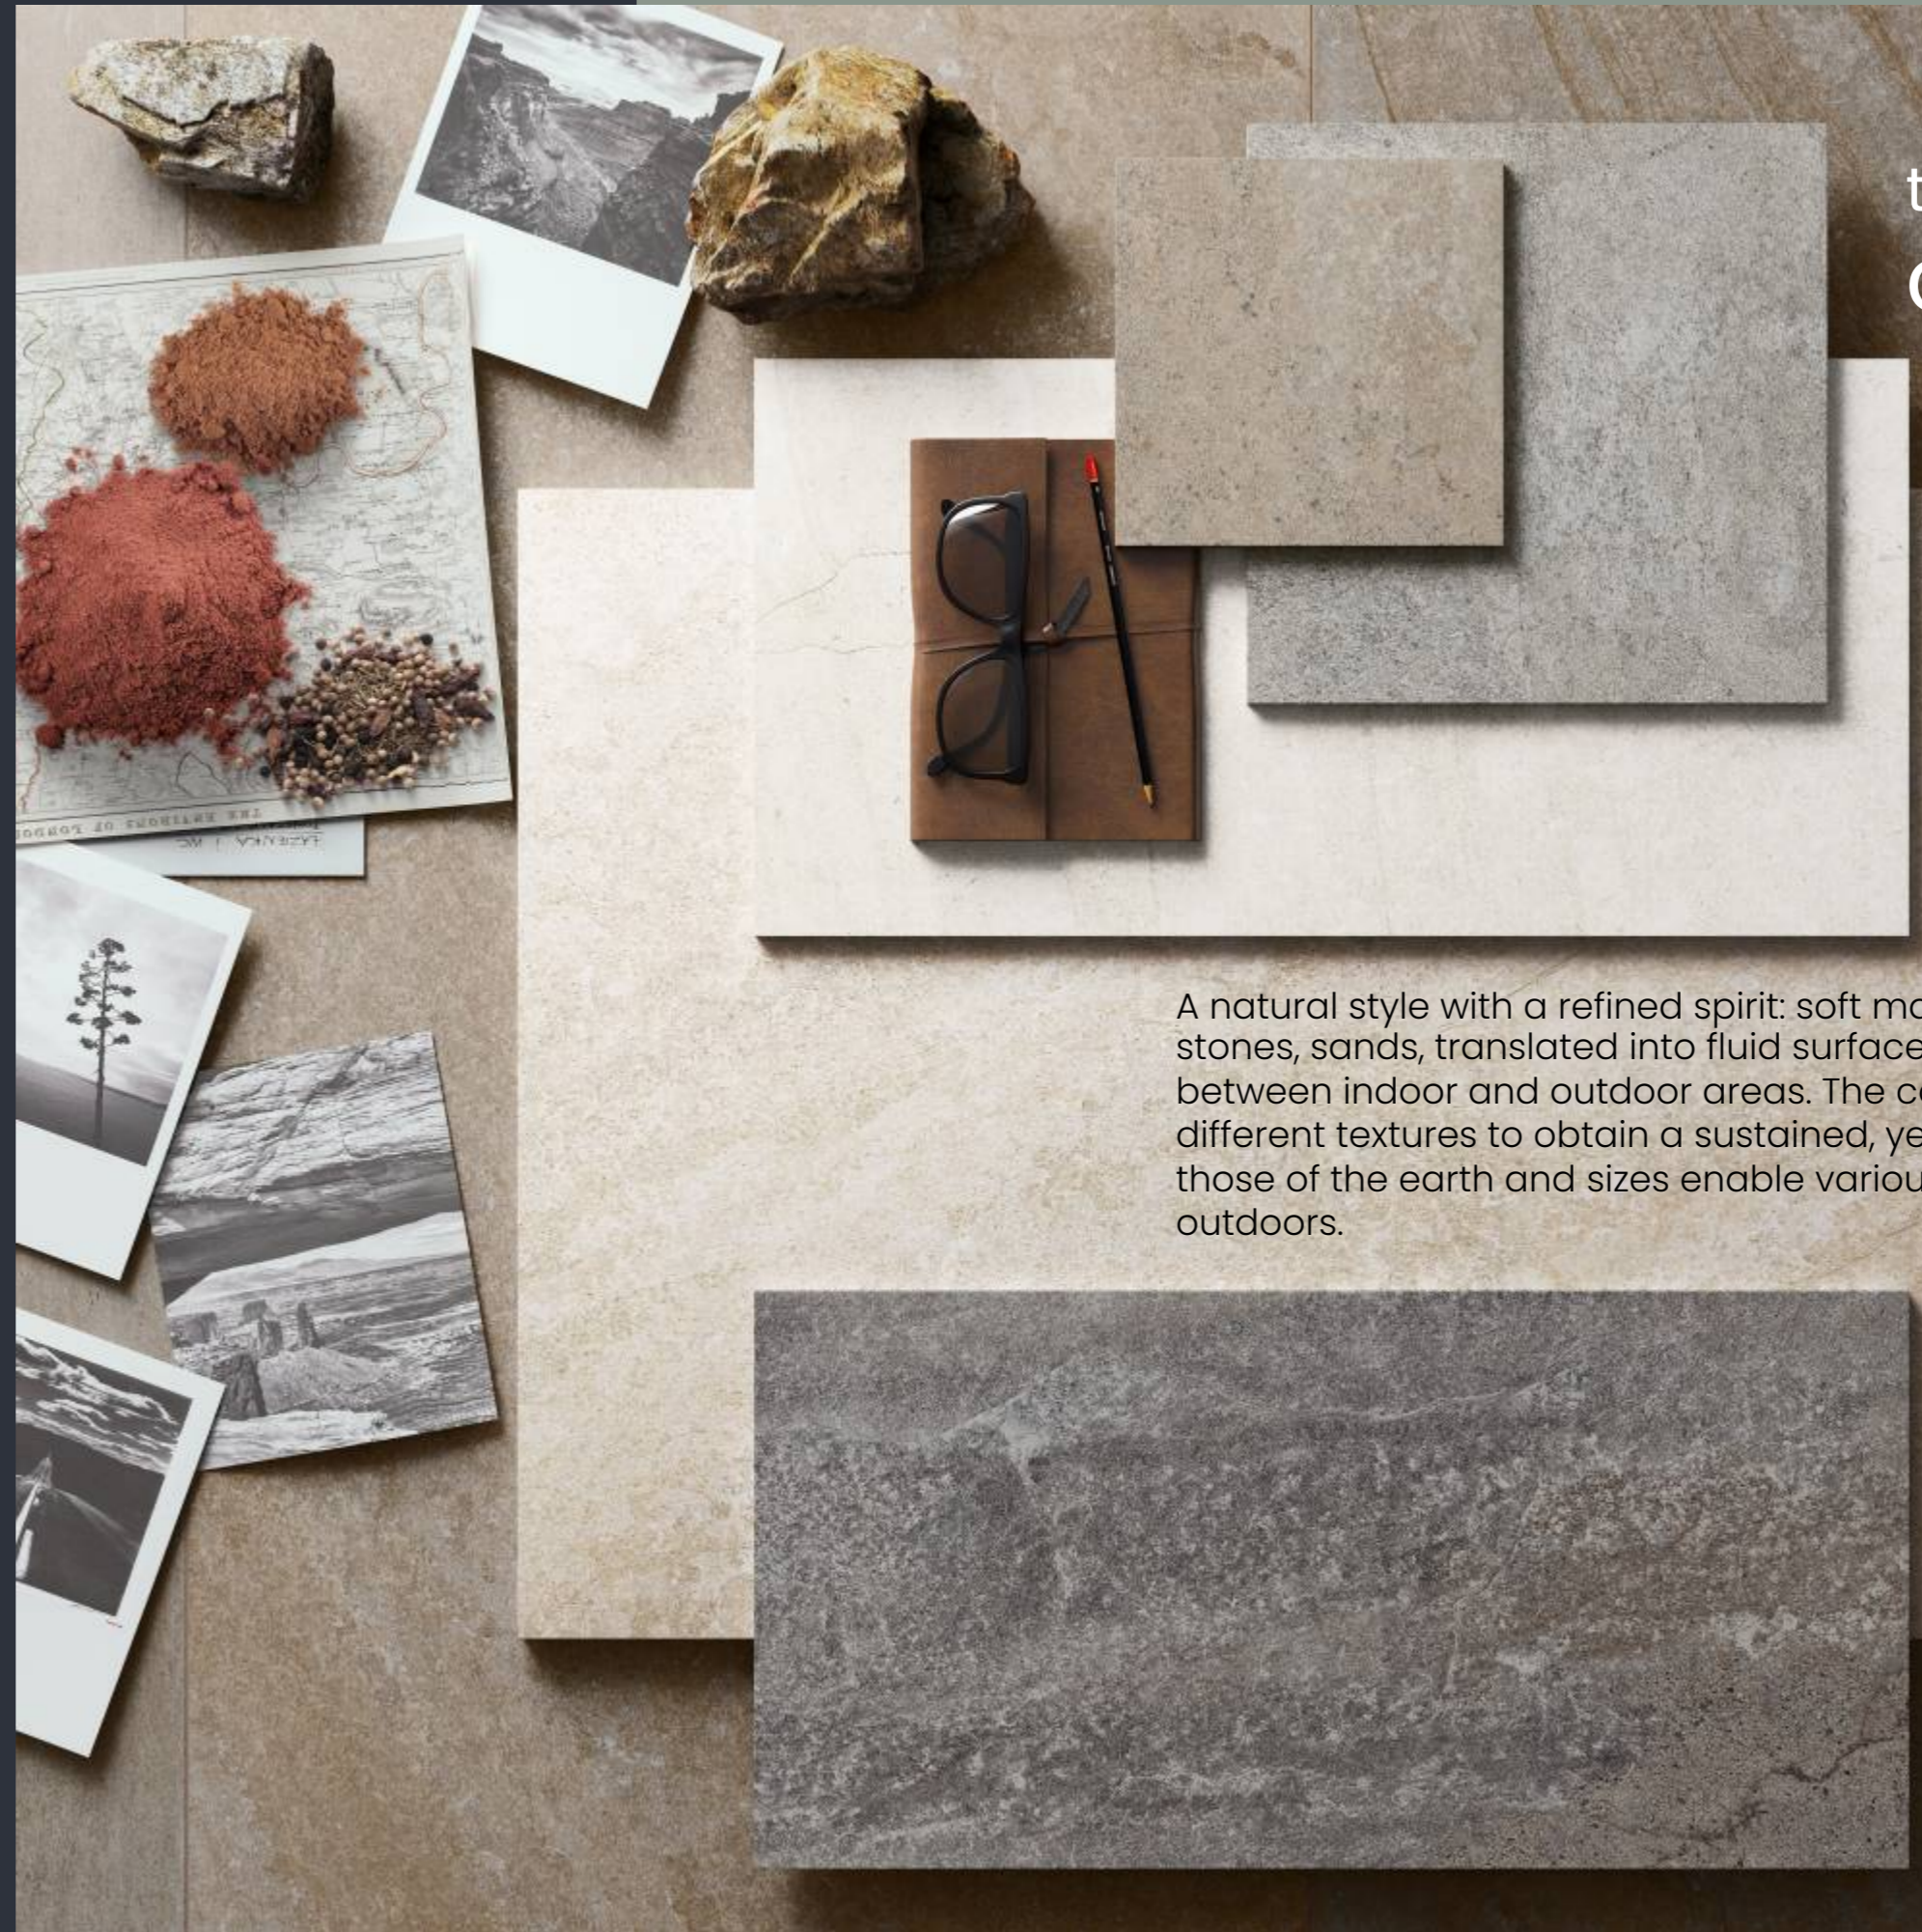

the collection

A natural style with a refined spirit: soft material effects interpret rocks, stones, sands, translated into fluid surfaces that transcend the border between indoor and outdoor areas. The collection originally combines different textures to obtain a sustained, yet balanced rhythm. Colours are those of the earth and sizes enable various laying solutions, also for outdoors.



WHITE P.4



BEIGE P.8



GREY P.12



NATURAL P.16



DARK P.20



TECHNICAL CHARACTERISTICS P.25

NATURAL
MOMENTS

the collection

-limestone effect -



white BL



beige BL




grey BL



natural BL



dark BL



FINISHES

natural R10 (nat)
grip R11 (gr)



THICKNESSES

9 mm
20 mm

Natural. A matt surface with a fine structure (R10B), perfect for residential and commercial uses; it conveys all the rich natural temperament of the five types of ceramic stone.

Grip. A moulded surface that reproduces a slight sandblasting effect, offering high slip resistance (R11C). Also available in the 20 mm thickness, specifically for outdoor applications.



WHITE
— BL —

white — o
inside floor: 600 x 1200 nat
outside: 600 x 1200 gr

white — o
floor: 600 x 1200 nat
wall: 300 x 600 nat





sensations of purity

white — o
floor: 600 x 1200 nat
wall: 300 x 600 nat

Mosaics



white —○
muretto 3D 315 x 450



INSPIRED WHITE




WHITE

600 x 1200 mm nat

SIZES & FINISHES



9 mm




natural R10 (nat)
grip R11 (gr)

600 x 1200 mm
nat
gr

600 x 600 mm
nat

300 x 600 mm
nat



muretto 3D
315 x 450 mm



BEIGE
— BL —

beige — o
muretto 3D 315 x 450



beige — o
wall: 600 x 1200 nat
floor: 600 x 600 nat

beige —
wall: 600 x 1200 nat
floor: 600 x 600 nat



refined simplicity



beige —
wall: 600 x 1200 nat
floor: 600 x 600 nat

Mosaics



beige — 
muretto 3D 315 x 450



SOPHISTICATED BEIGE



BEIGE
600 x 1200 mm nat

SIZES & FINISHES



9 mm



20 mm



natural R10 (nat)
grip R11 (gr)



grip R11 (gr)


600 x 1200 mm
nat
gr

600 x 1200 mm
gr

600 x 600 mm
nat

600 x 600 mm
gr

300 x 600 mm
nat




muretto 3D
315 x 450 mm



GREY
— BL —

grey —
floor: 600 x 600 nat
wall: 300 x 600 nat

Marks and differences in colour enhance the surfaces, whilst retaining a gentle balance and a light-weight effect.

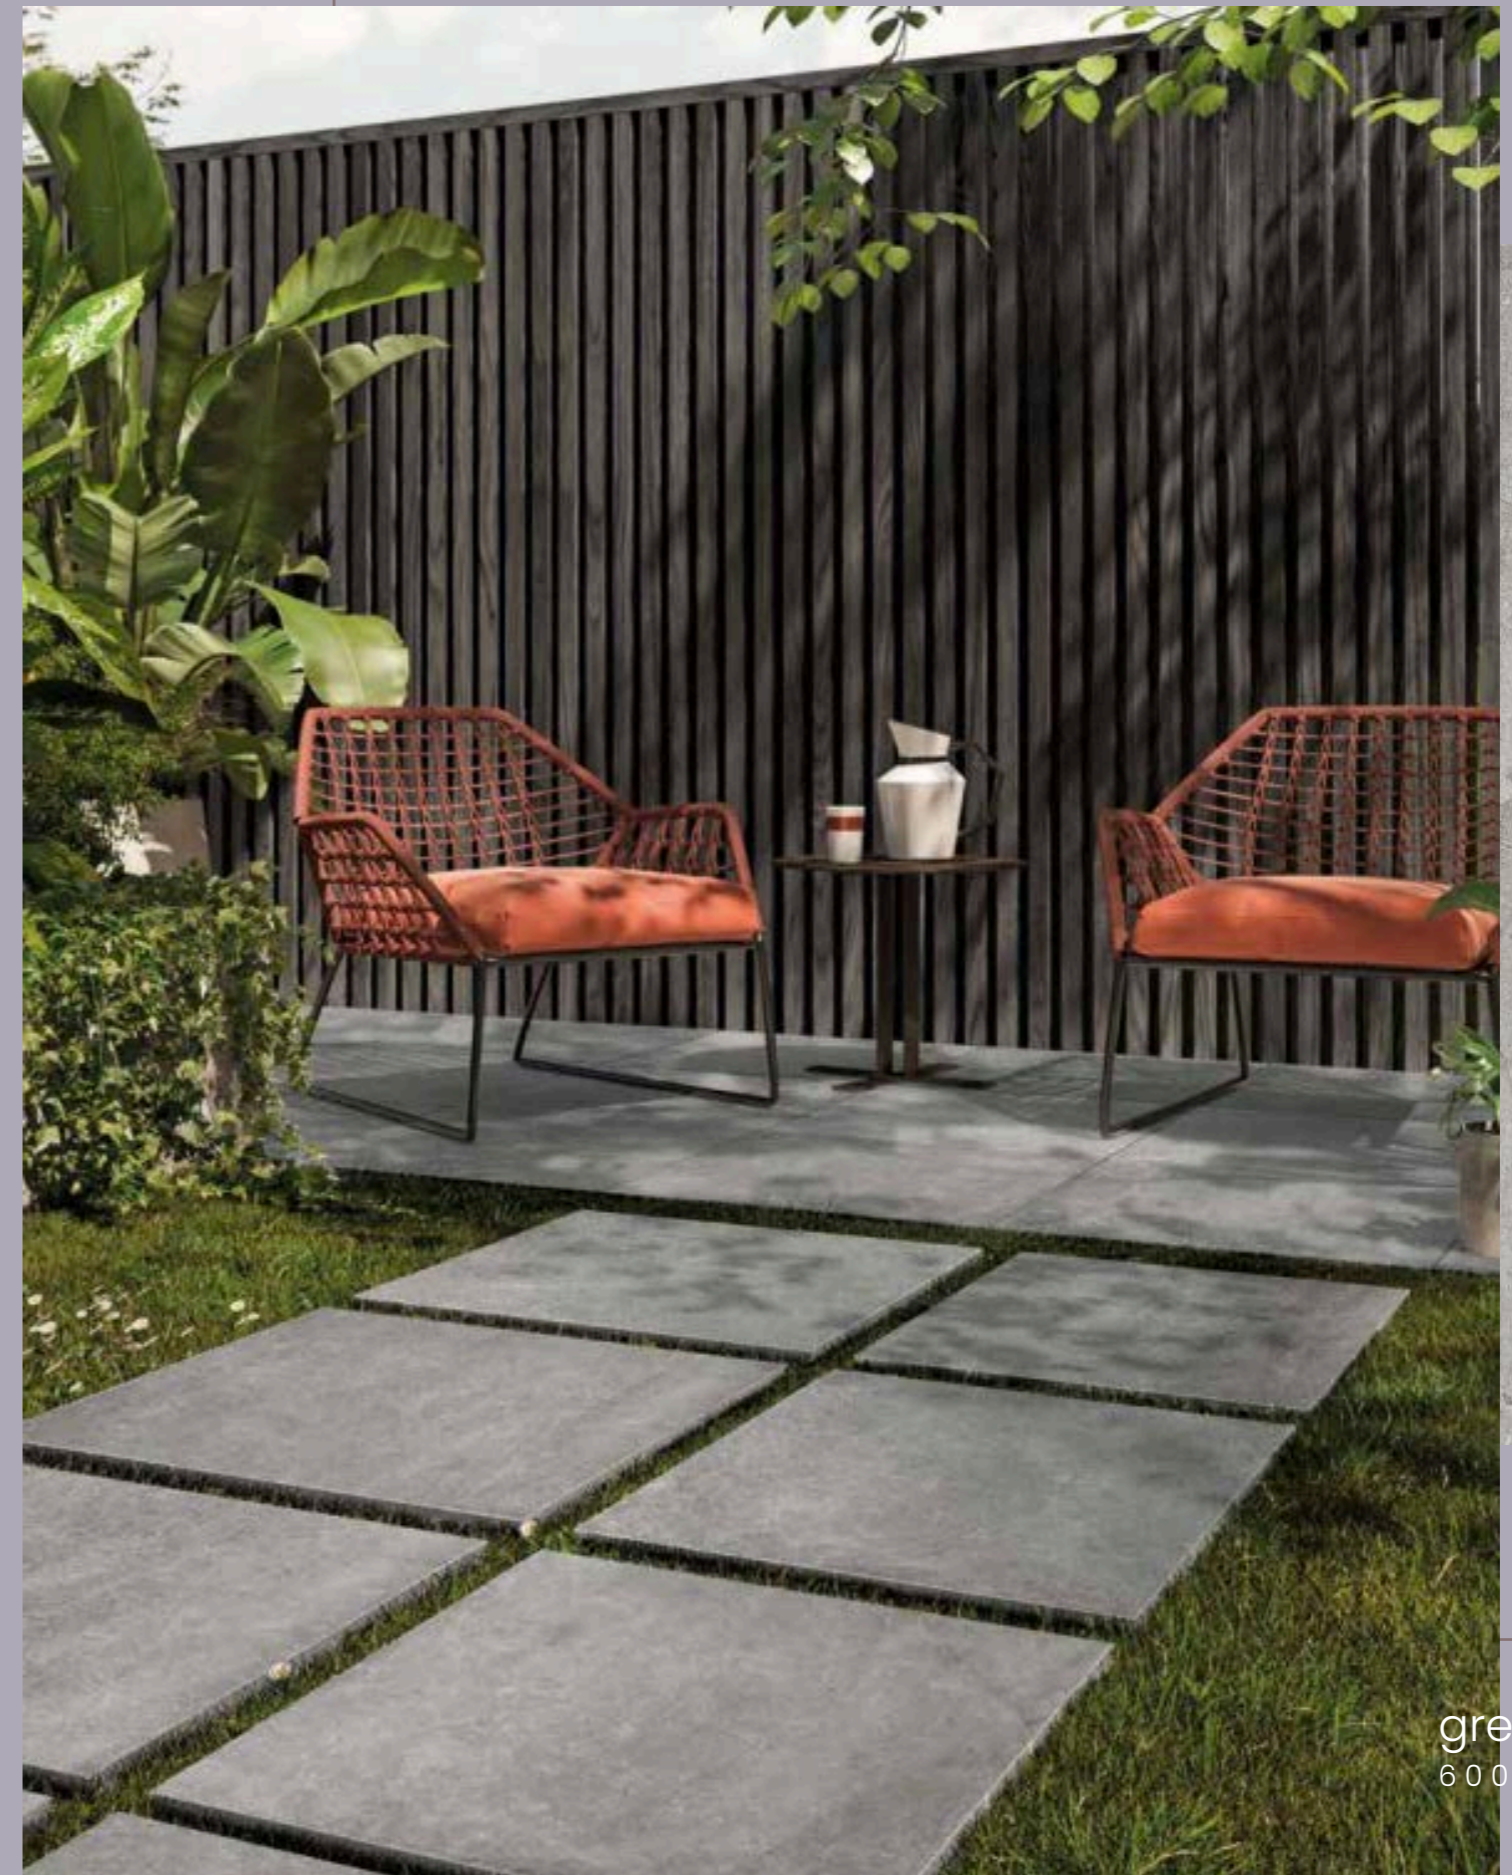

grey —
600 x 600 gr (20mm)




fluid surfaces


The material creates visual and textured continuity, overcoming the confines between indoors and out.

grey —
floor: 600 x 600 nat
wall: 300 x 600 nat

Mosaics



grey — 
muretto 3D 315 x 450

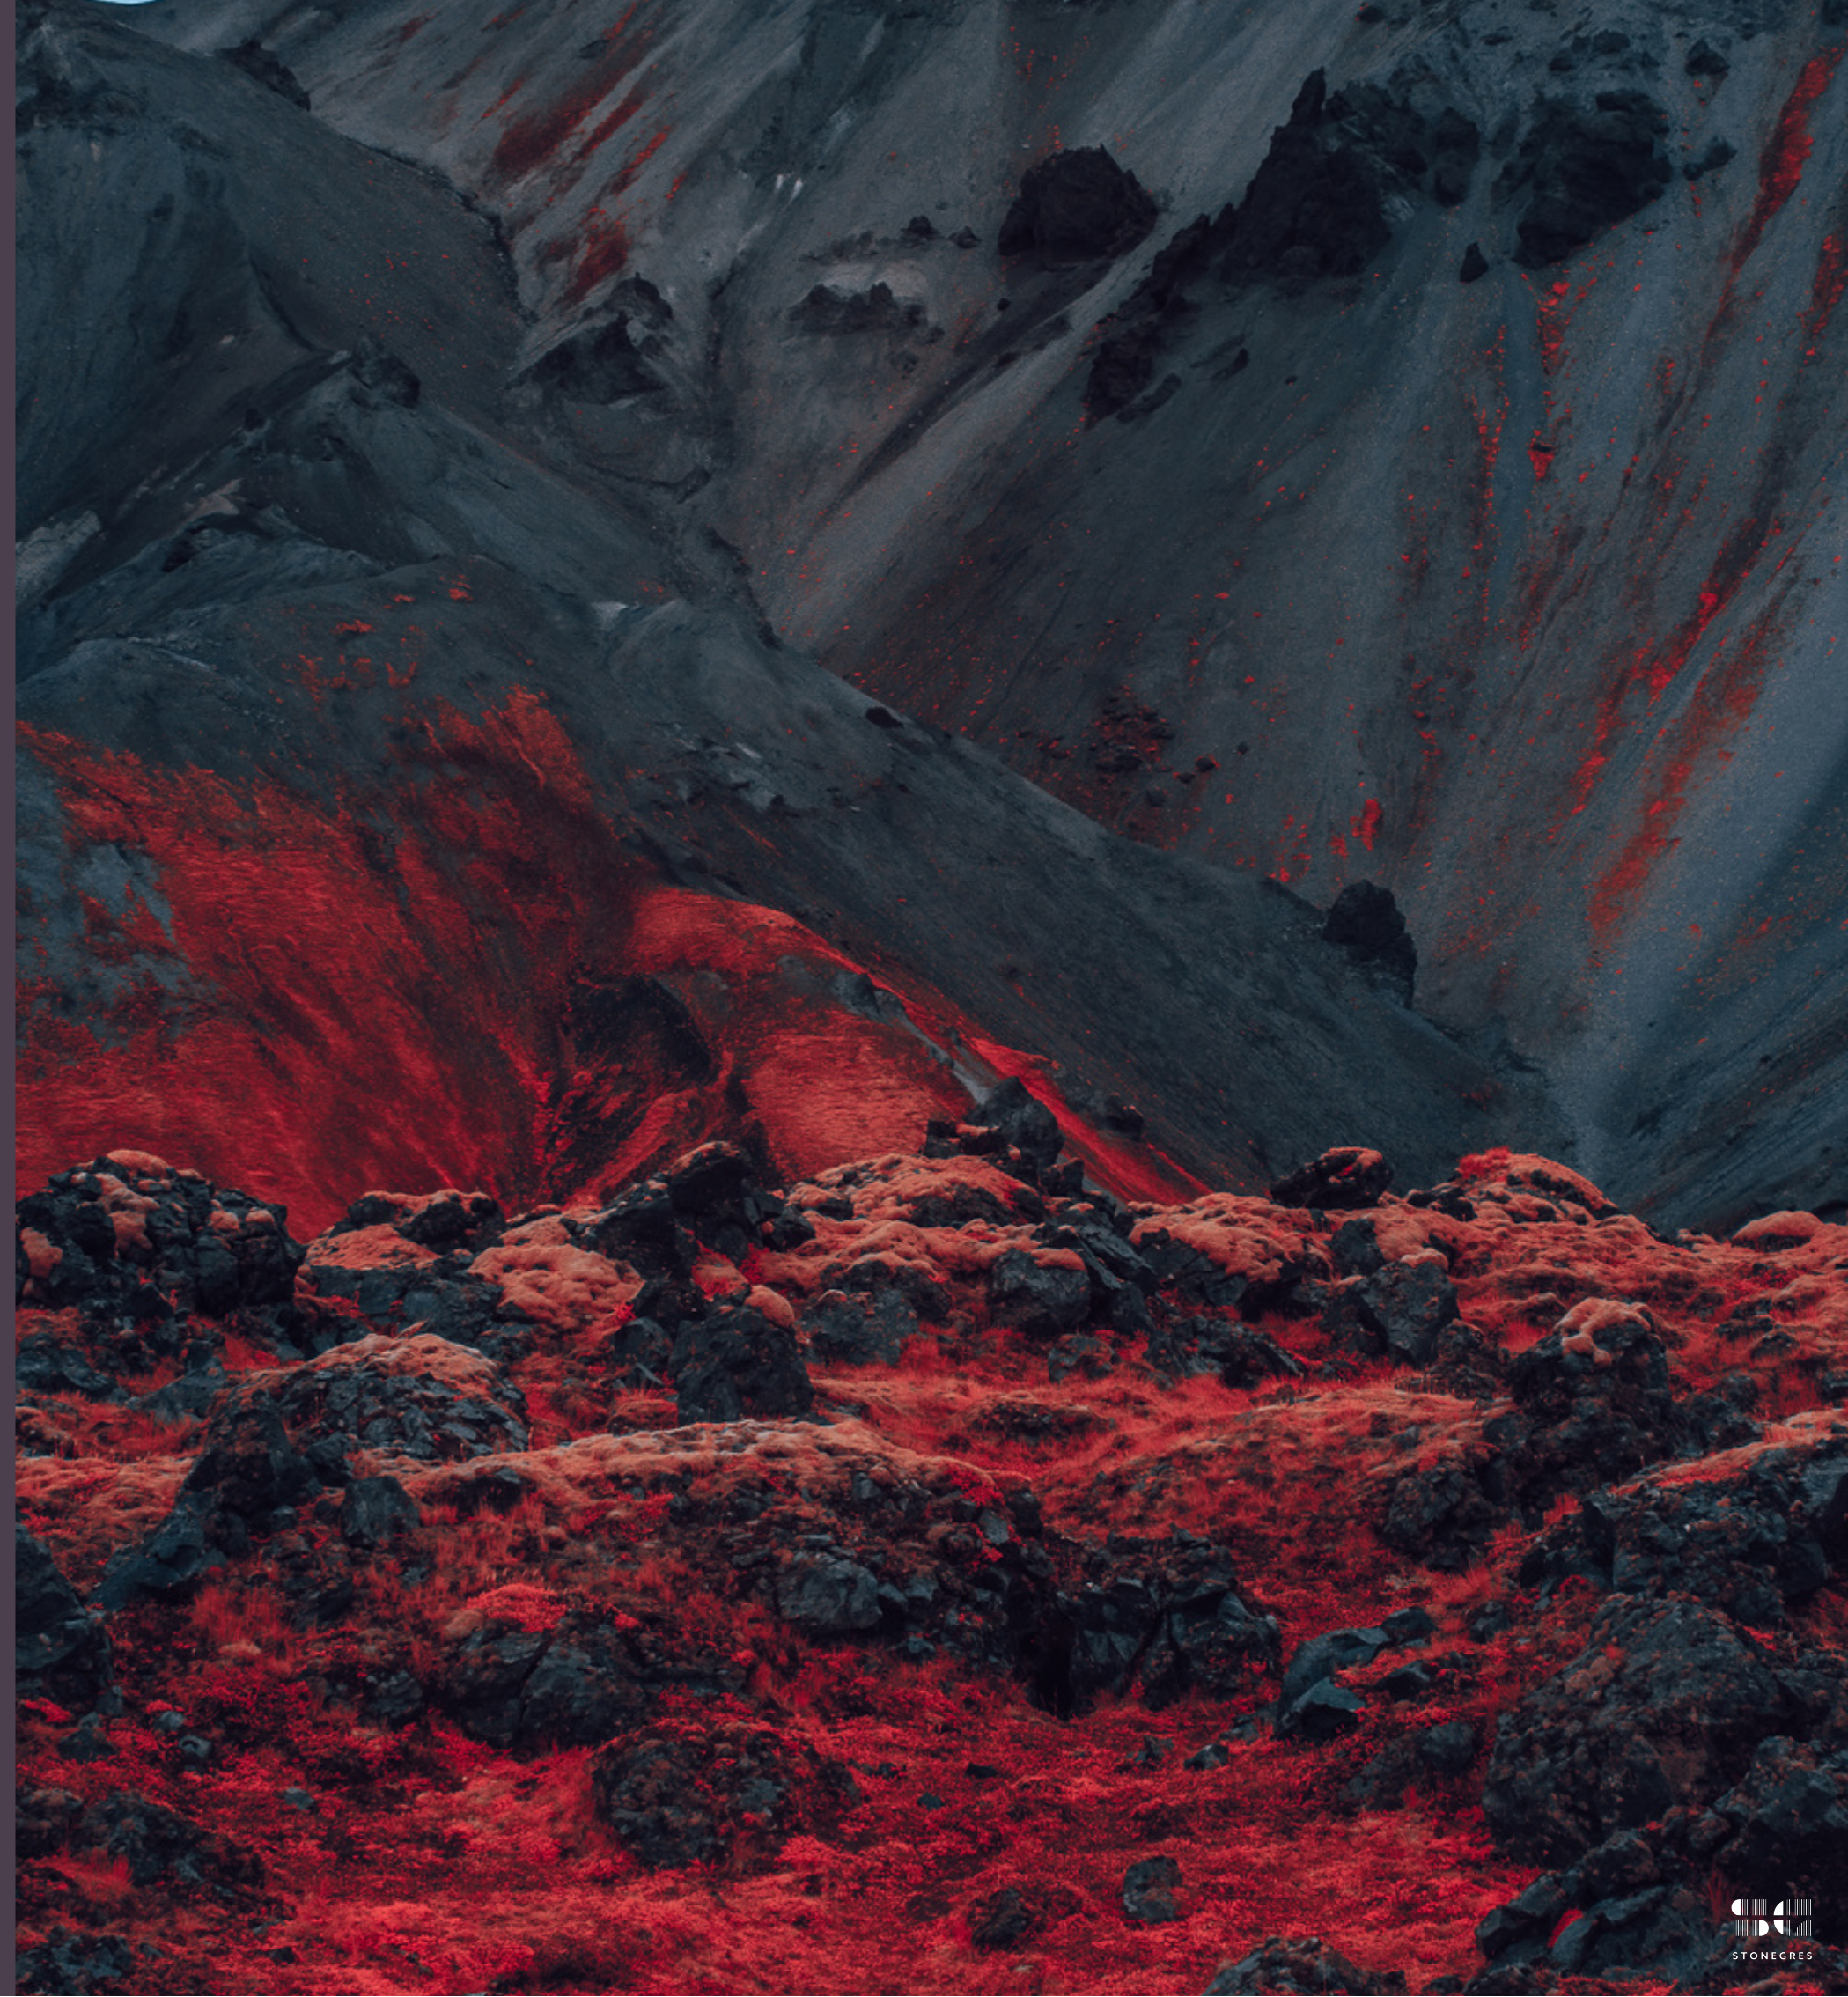

NATURAL GREY



GREY
600 x 1200 mm nat


SIZES & FINISHES




9 mm




20 mm




natural R10 (nat)
grip R11 (gr)




grip R11 (gr)

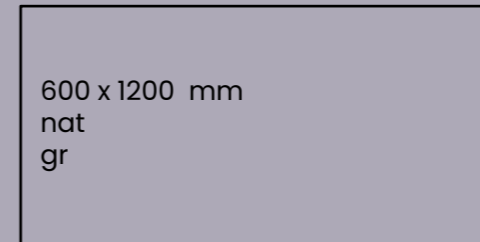


600 x 1200 mm
nat
gr

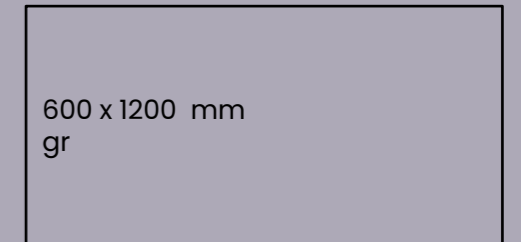


600 x 1200 mm
gr




600 x 600 mm
nat



600 x 600 mm
gr



300 x 600 mm
nat



muretto 3D
315 x 450 mm



NATURAL
— BL —

natural —
600 x 1200 nat

natural —
600 x 1200 nat



Several naturally-inspired textures are combined and give rise to an original material that is met with global appreciation.

visual continuity



natural — o
600 x 1200 gr (20mm)



l i m e s t o n e - e f f e c t

natural

Mosaics



natural —
muretto 3D 315 x 450

UNDERSTATED NATURAL



NATURAL
600 x 1200 mm nat

SIZES & FINISHES



9 mm



20 mm



natural R10 (nat)
grip R11 (gr)



grip R11 (gr)


600 x 1200 mm
nat
gr

600 x 1200 mm
gr

600 x 600 mm
nat

600 x 600 mm
gr


300 x 600 mm
nat




muretto 3D
315 x 450 mm



DARK
— BL —

dark — 
 floor: 600 x 600 nat
 wall: 600 x 1200 nat
 outside: 600 x 600 gr (20mm)

dark — 
 floor: 600 x 600 nat
 wall: 600 x 1200 nat
 outside: 600 x 600 gr (20mm)





dark — o
wall: 600 x 1200 nat
floor: 600 x 600 nat




nature inspired

dark — o
600 x 600 gr (20mm)



dark — o
inside floor: 600 x 600 nat
outside: 600 x 600 gr (20mm)



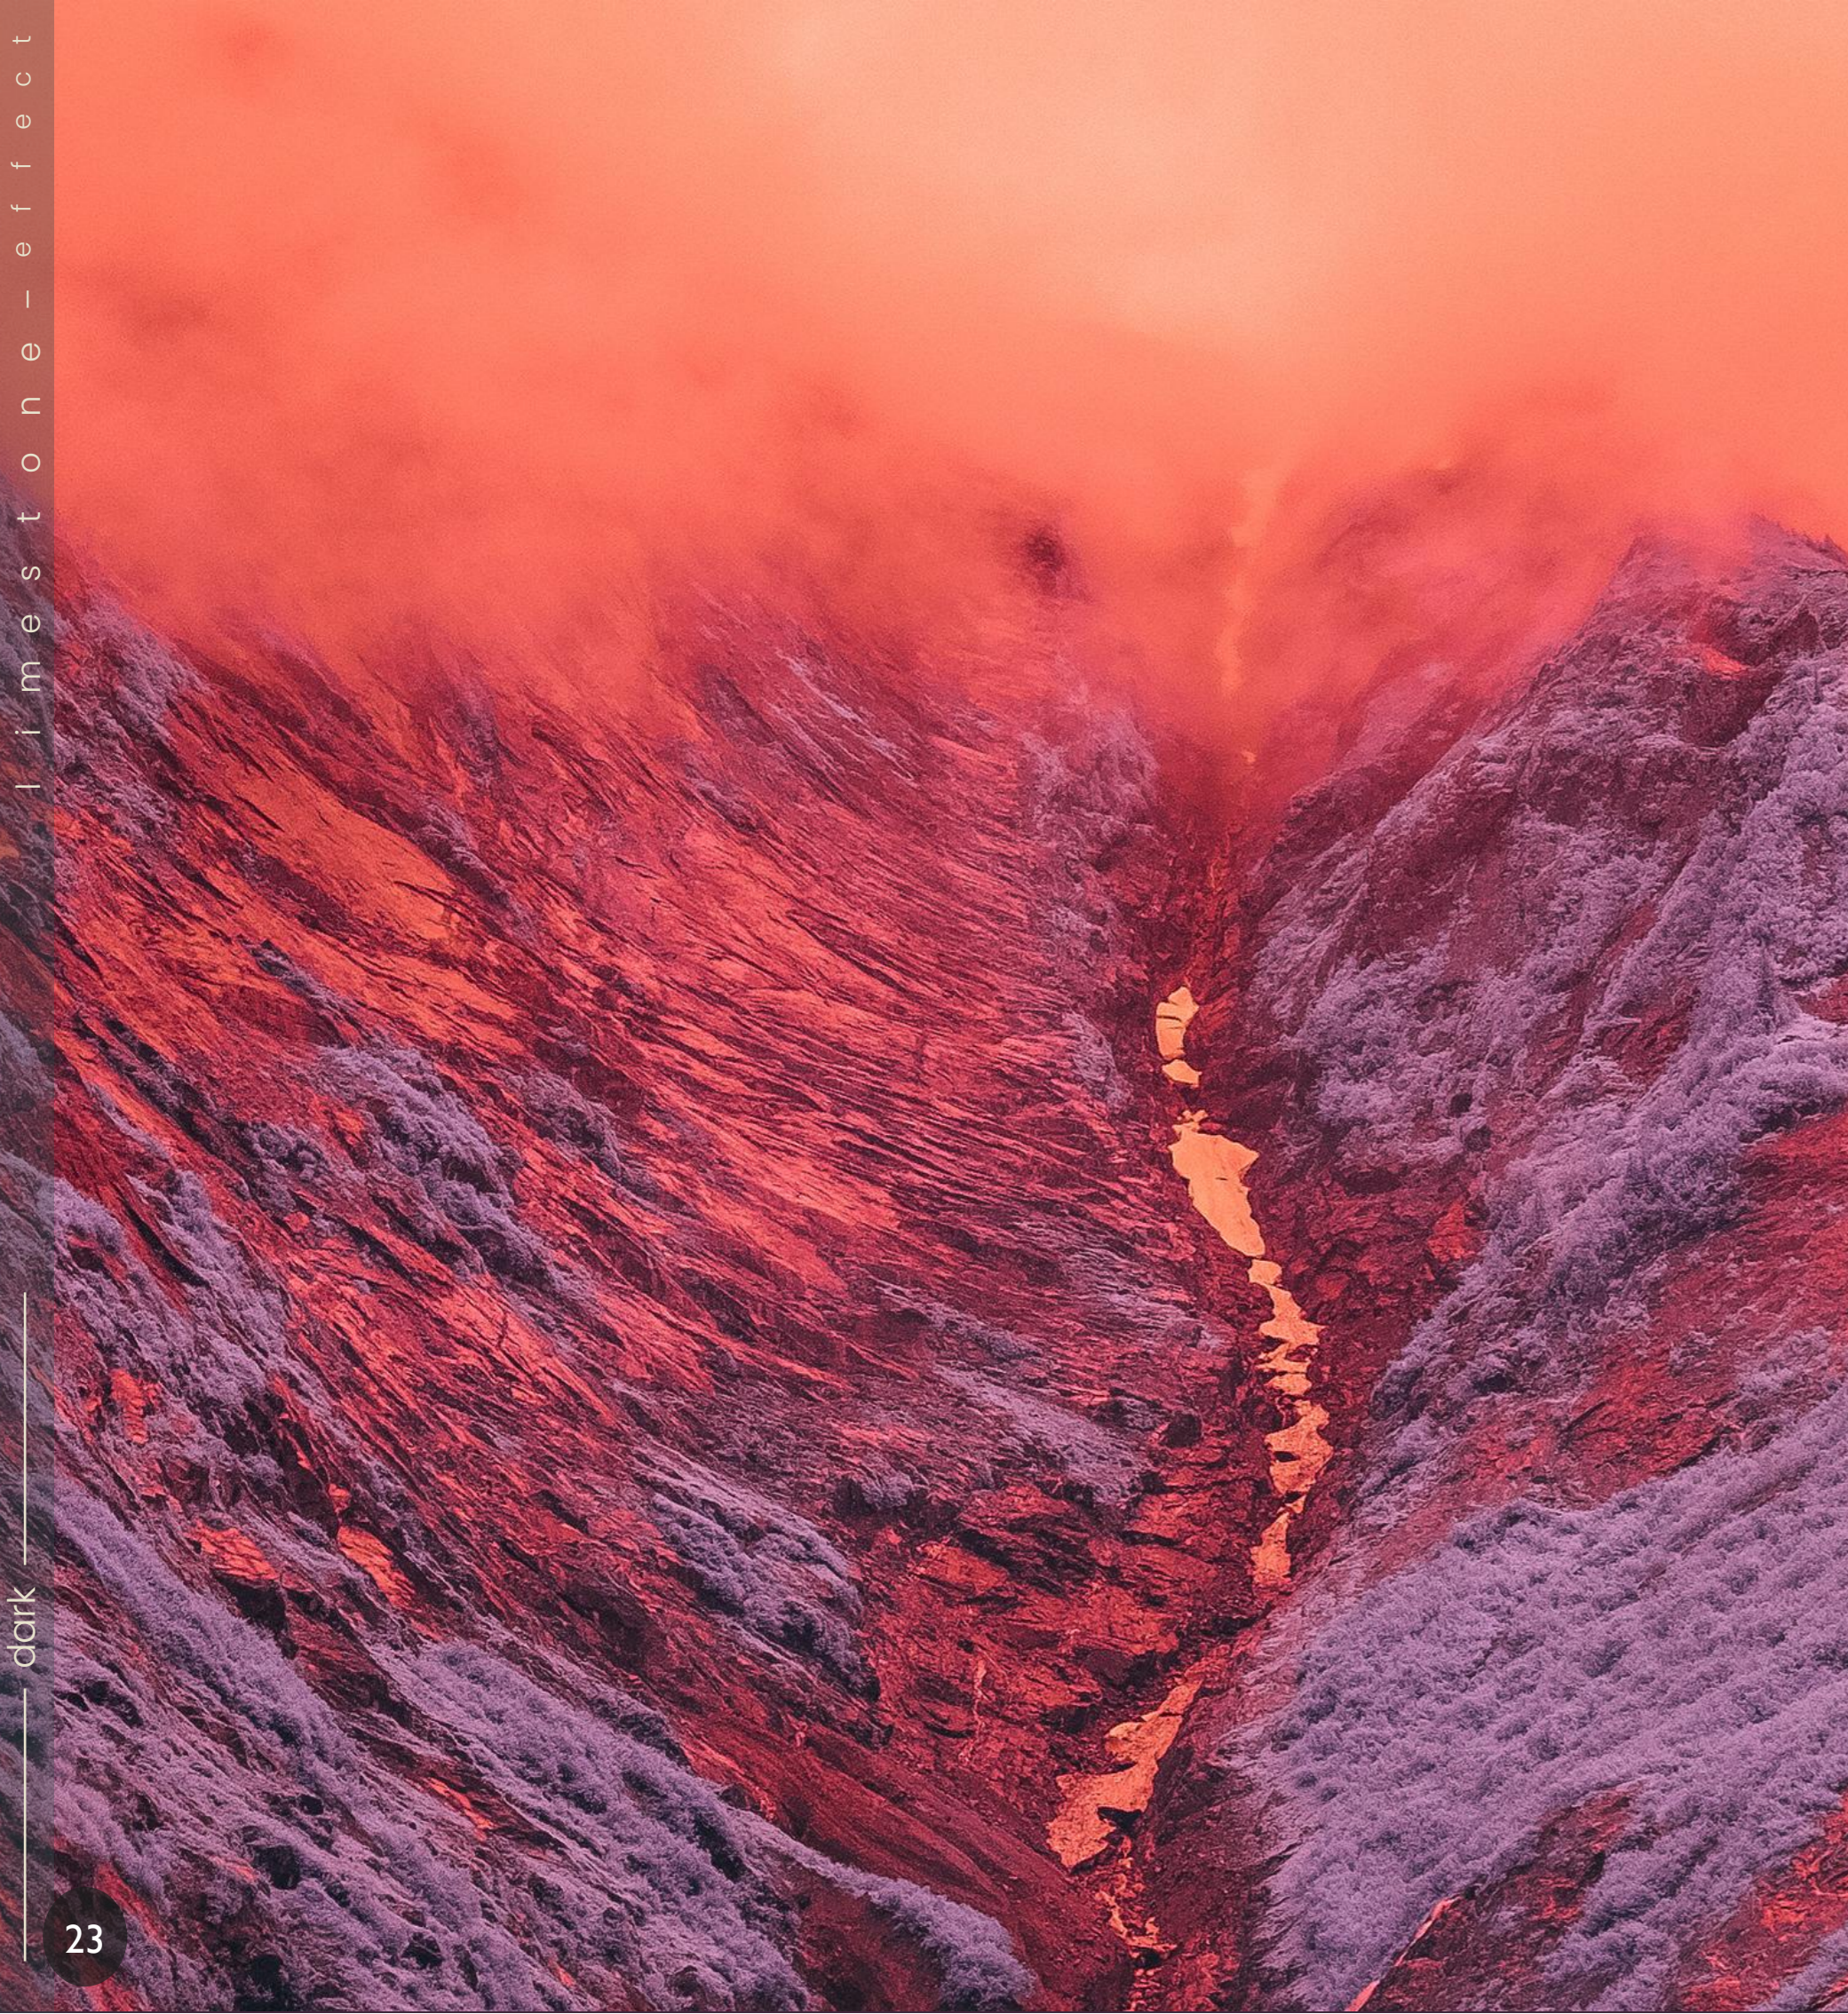

Mosaics



dark — o
muretto 3D 315 x 450

DELUXE DARK



D A R K

wall: 600 x 1200 mm nat
floor: 600 x 600 mm nat


SIZES & FINISHES



9 mm



20 mm



natural R10 (nat)
grip R11 (gr)




grip R11 (gr)

600 x 1200 mm
nat
gr

600 x 600 mm
gr


600 x 600 mm
nat

300 x 600 mm
nat



muretto 3D
315 x 450 mm

The marked chromatic variation and the veining of the product is an intrinsic feature to re-create the randomness and richness of the colour shading of natural stones to which the collection is inspired. For these reasons, we recommend installing the product choosing tiles from different boxes in order to guarantee a variable and natural random effect of the finished surface. Due to these intrinsic features of the product, the colours represented in this catalogue must only be considered an example of the many possible colour shades



technical characteristics



Gres Fine Porcellanato – EN 14411 ISO 13006 Gruppo Bla Annex G

features



class 5



R10 (nat)
R11 (gr)



A+B+C (gr)
A+B+C (gr 20mm)



≥ 36 wet nat













bagnato > 0.40



> 0.42 wet

		standard	required standards	value
<p>UNI EN ISO 10545/2</p> <p>DIMENSIONS</p>	length & width	EN ISO 10545-2	± 0.3% max 1.0 mm	complying
	thickness	EN ISO 10545-2	± 0.5% max 0.5 mm	complying
	linearity	EN ISO 10545-2	± 0.3% max 0.8 mm	complying
	wedging (according to ISO 13006)	EN ISO 10545-2	± 0.3% max 1.5 mm	complying
	warpage	EN ISO 10545-2	± 0.4% max 1.8 mm	complying

Gres Fine Porcellanato – EN 14411 ISO 13006 Gruppo Bla Annex G

	standard	required standards	value
			nat
 WATER ABSORPTION <small>UNI EN ISO 10545/3</small>	EN ISO 10545-3	≤ 0.5%	≤ 0.2%
 FLEX RESISTANCE <small>UNI EN ISO 10545/4</small>	EN ISO 10545-4	S ≥ 1300 N (thickness ≥ 7.5 mm) R ≥ 35N/mm ²	compliant
 COEFFICIENT OF RESTITUTION (COR) <small>UNI EN ISO 10545/5</small>	EN ISO 10545-5	recommended value ≥ 0.55/	compliant
 DEEP ABRASION RESISTANCE <small>UNI EN ISO 10545/6</small>	EN ISO 10545-6	≤ 175 mm ³	compliant
 ABRASION RESISTANCE <small>UNI EN ISO 10545/7</small>	EN ISO 10545-7	PEI (only for glazed tiles)	-
 COEFFICIENT OF THERMAL LINEAR EXPANSION <small>UNI EN ISO 10545/8</small>	EN ISO 10545-8	test methods available	≤ 7 · 10 ⁻⁶ · C ⁻¹
 THERMAL SHOCK RESISTANCE <small>UNI EN ISO 10545/9</small>	EN ISO 10545-9	no sample must show visible defects	compliant
 MOISTURE EXPANSION <small>UNI EN ISO 10545/10</small>	EN ISO 10545-10	test methods available	≤ 0.02% (0.2 mm/m)
 FIRE RESISTANCE <small>UNI EN ISO 13501-1</small>	EN ISO 13501-1	declare a value Class A1 or A _{1fl}	A _{1fl}
 FROST RESISTANCE <small>UNI EN ISO 10545/12</small>	EN ISO 10545-12	resistant	compliant




technical characteristics

“Ceramics of Italy”



100%
MADE IN ITALY



Gres Fine Porcellanato – EN 14411 ISO 13006 Gruppo Bla Annex G

	standard		required standards	value	
				nat	gr
 CHEMICAL RESISTANCE <small>UNI EN ISO 10545/13</small>	EN ISO 10545-13	resistance to household chemicals and swimming pool salts	minimum Class B (GB for glazed tiles) minimum Class B (UB for unglazed tiles)	A	
		resistance to low concentrations of acids and alkalis	declare a class test methods available	LA	
		resistance to high concentrations of acids and alkalis	declare a class test methods available	HA	
 STAIN RESISTANCE <small>UNI EN ISO 10545/14</small>	EN ISO 10545-14		UGL declare a value GL ≥ 3	Class 5 resistant	
 LEAD & CADMIUM DISCHARGE <small>UNI EN ISO 10545/15</small>	EN ISO 10545-15		declared value for GL tiles	-	

technical characteristics

	standard	required standards	value	
			nat	gr
 ASSESSMENT OF SLIP RESISTANCE	DIN 51130	declare a value (R)	R10	R11
	DIN 51097	declare a value (A+B+C)	-	A+B+C
	BS7976-2-2002(CEN/TS 16165, Annex C) pendulum friction test	declare a value	≥ 36 wet nat	-
 MEASUREMENT OF DYNAMIC COEFFICIENT OF FRICTION	B.C.R.A. Rep. CEC/81	bagnato > 0.40	bagnato > 0.40	bagnato > 0.40
	ANSI A137.1-2012 (BOT3000)	> 0.42 wet	> 0.42 wet	> 0.42 wet





STONEGRES

Stonegres Limited
20-22 Wenlock Road
London
N1 7GU
tel: 020 8943 3154

info@stonegres.co.uk | www.stonegres.co.uk