



C Nature Soul Wood

Charm with Attitude

"In all things of nature there is something of the marvelous." – Aristotle




eSSSENCE of Nature

the
collection

A unique combination of details. Textural surfaces with different woods creating a balance of homogenous and dynamic wood-effect porcelain tiles. Inspired by old wood used in mountain huts transforming the old into a modern experience.

Available in four different shades , with beautiful colour variations and shading, due to the combination of various types of wood and different degrees of ageing. The installed surface is balanced by alternating between more homogeneous and more detailed wooden boards.

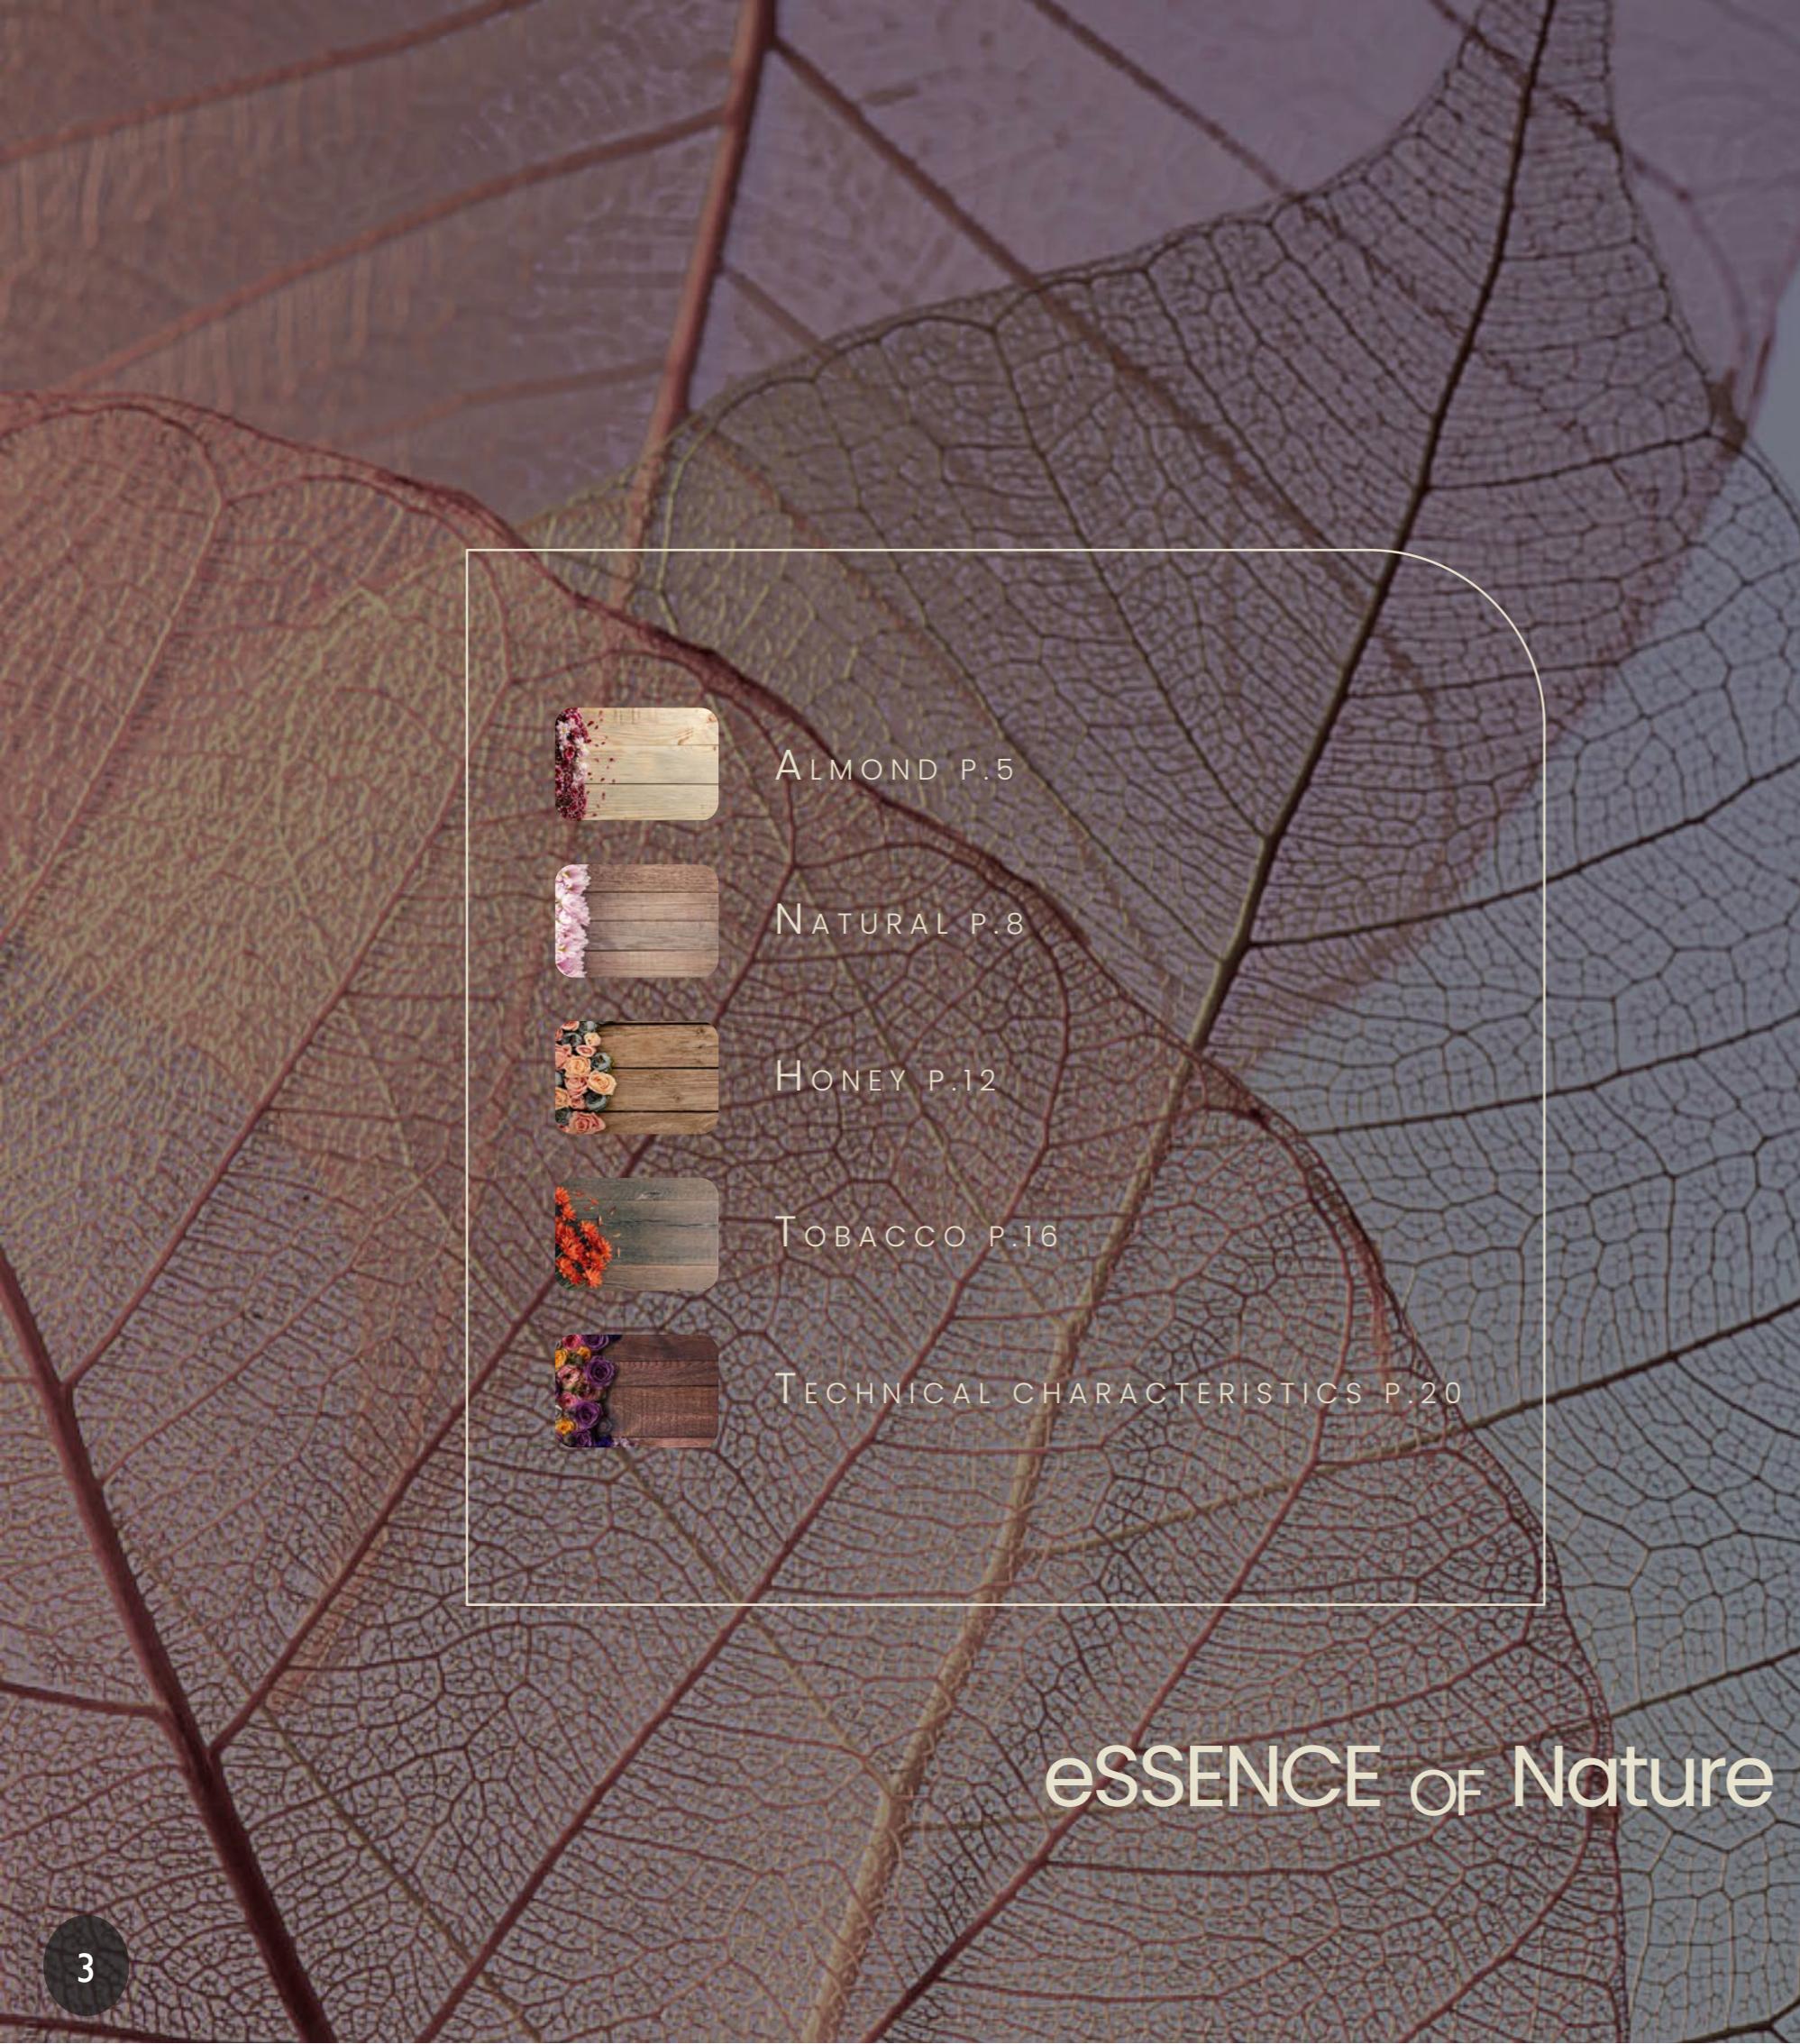

the collection

- wood effect -



eSSENCE of Nature



FINISHES

natural R10 (nat)
grip R11 (gr)



THICKNESSES

9 mm
20 mm



almond CT natural CT honey CT tobacco CT

Available in both a natural finish for indoors and in a structured anti-slip finish for outdoor use, perfection with visual continuity between inside and out, without compromising.



planks



hexagon



herringbone



size



362 x 412 mm (sheet size)

nat

chalet slats

The chalet slats feature a groove on one long side, for a relief installation.


Chalet is made up of slats cut from the bottom and reassembled in a sloping arrangement, reminiscent of the external cladding of traditional buildings.



sizes

150 x 900 mm
nat

120 x 750 mm
nat

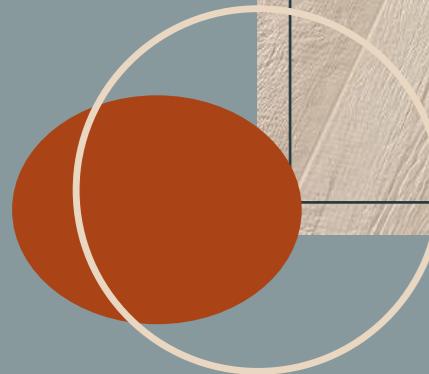


almond —0
250 x 1500 nat



almond —0
floor: 250 x 1500 nat
walls: chalet 120x750 nat



almond —0
250 x 1500 nat

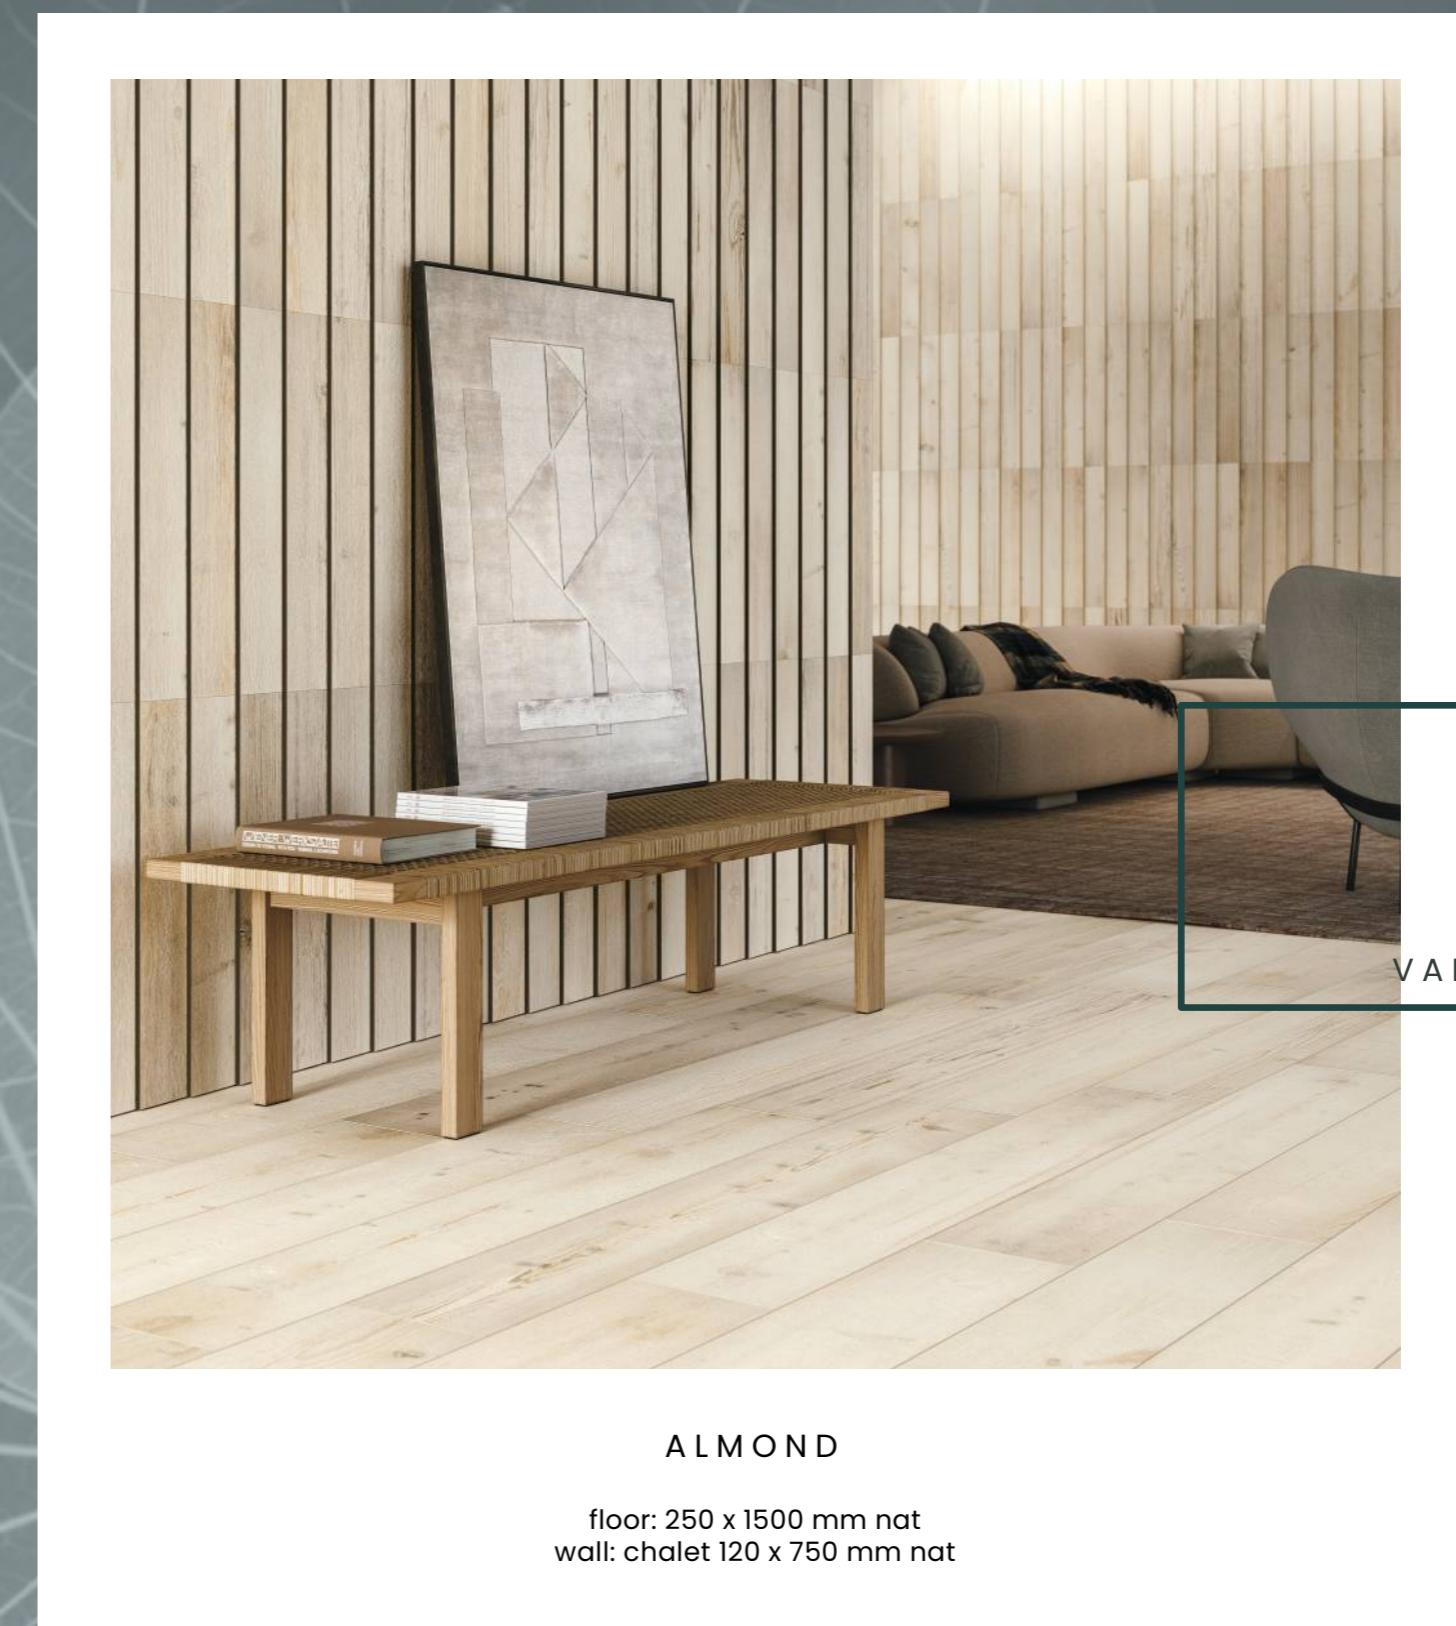

VANILLA ALMOND

ALMOND


floor: 250 x 1500 mm nat
wall: chalet 120 x 750 mm nat

The lightest and most neutral shade.

SIZES & FINISHES



9 mm




natural R10 (nat)




250 x 1500 mm
nat




150 x 900 mm chalet
nat



120 x 750 mm chalet
nat



hexagon
250 x 216 mm

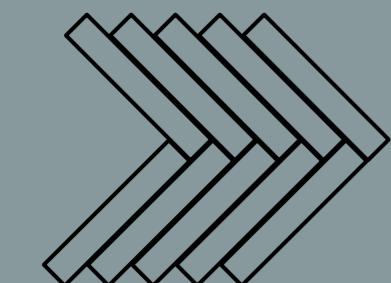


herringbone
362 x 412 mm




20 mm



grip R11 (gr)

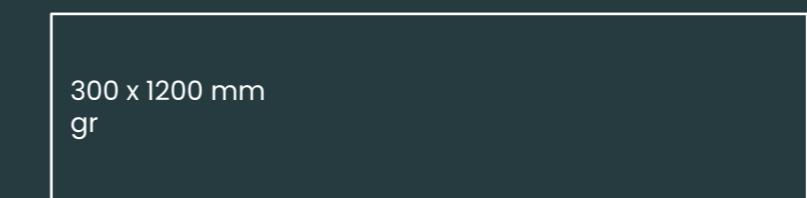

300 x 1200 mm
gr

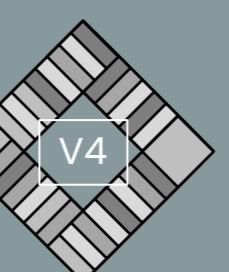


R 10

SKID
RESISTANCE



R 11

SKID
RESISTANCE

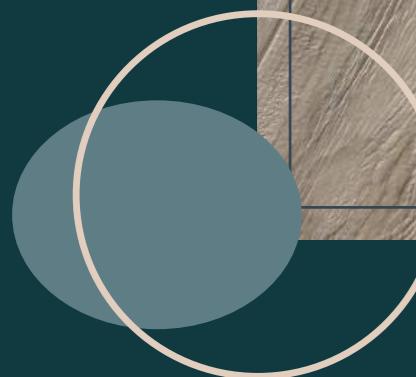

A less saturated shade



natural —0
floor: 150 x 900 nat
wall: chalet 150 x 900 nat

calming comfort



natural —o
herringbone 362 x 412 nat



natural —0

floor: 250 x 1500 nat

walls: hexagon 250 x 216 nat




NATURAL

250 x 1500 mm nat

SIZES & FINISHES



9 mm




natural R10 (nat)



250 x 1500 mm
nat



150 x 900 mm chalet
nat



120 x 750 mm chalet
nat



hexagon
250 x 216 mm




herringbone
362 x 412 mm




20 mm



grip R11 (gr)

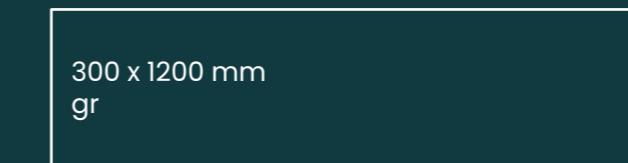

300 x 1200 mm
gr

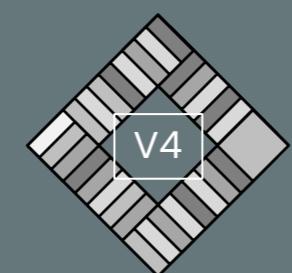


NAT
R 10
SKID
RESISTANCE



GR
R 11
SKID
RESISTANCE



honey —o
250 x 1500 nat

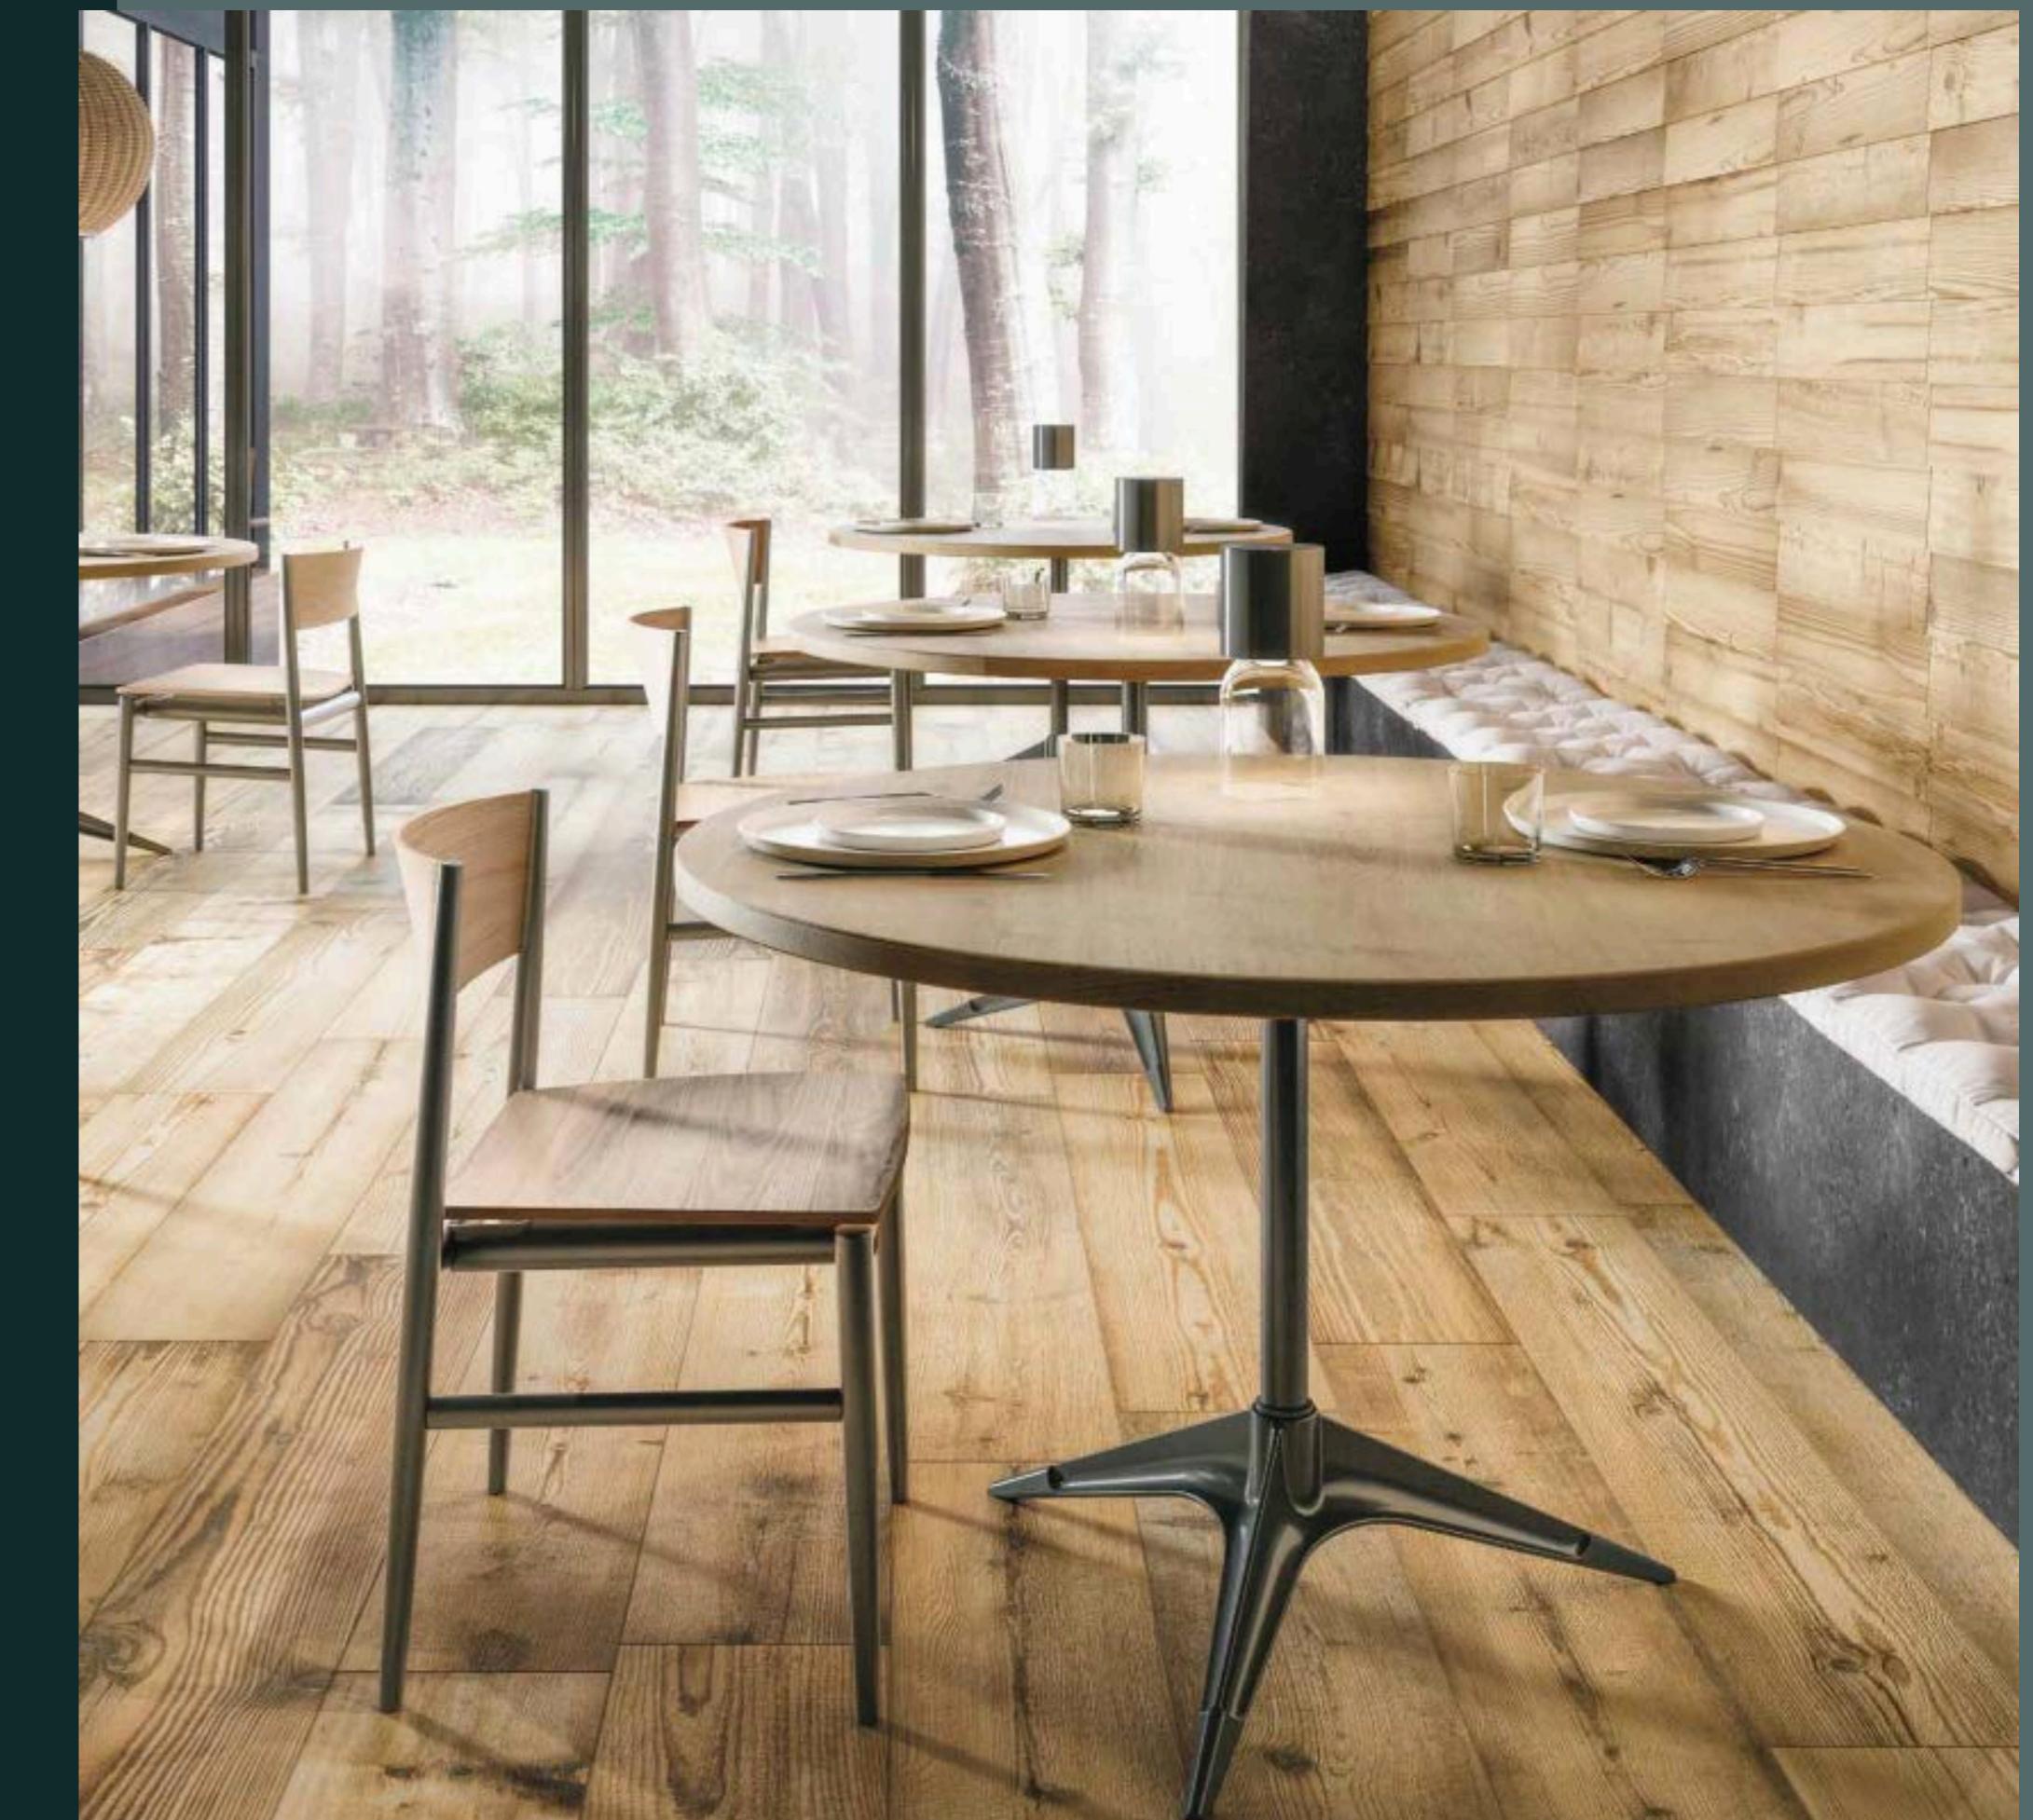

honey —o
floor: 250 x 1500 nat
wall: chalet 120x750 nat



honey —0
floor: 250 x 1500 nat
walls: chalet 120x750 nat



honey —0
250 x 1500 nat

strong sensations

honey —0
250 x 1500 nat




An enlightened mix of different woods: some examples of the essences making up Beira



Fir wood: exposure to the sun and weather has materialised in a material with a bold tone.



Larch wood: distinguished by rings of varying sizes revealing its hardness and durability.

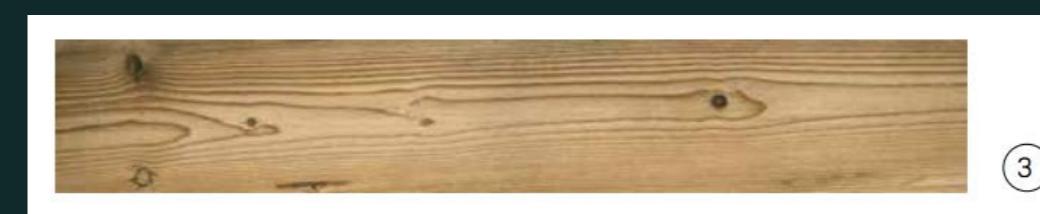

Fir & Pine wood: passage of time , man and the sun have crafted unexpected details onto the surface.





*Reminiscent of the original colour of
wood exposed to sunlight.*




HONEY
250 x 1500 mm nat

SIZES & FINISHES



9 mm



natural R10 (nat)



250 x 1500 mm
nat



150 x 900 mm chalet
nat




120 x 750 mm chalet
nat



hexagon
250 x 216 mm



herringbone
362 x 412 mm

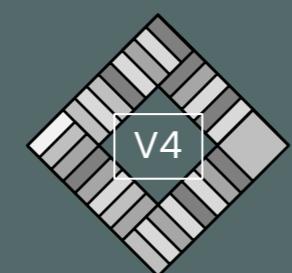

V4

NAT
R 10
SKID
RESISTANCE

GR
R 11
SKID
RESISTANCE




20 mm



grip R11 (gr)



300 x 1200 mm
gr

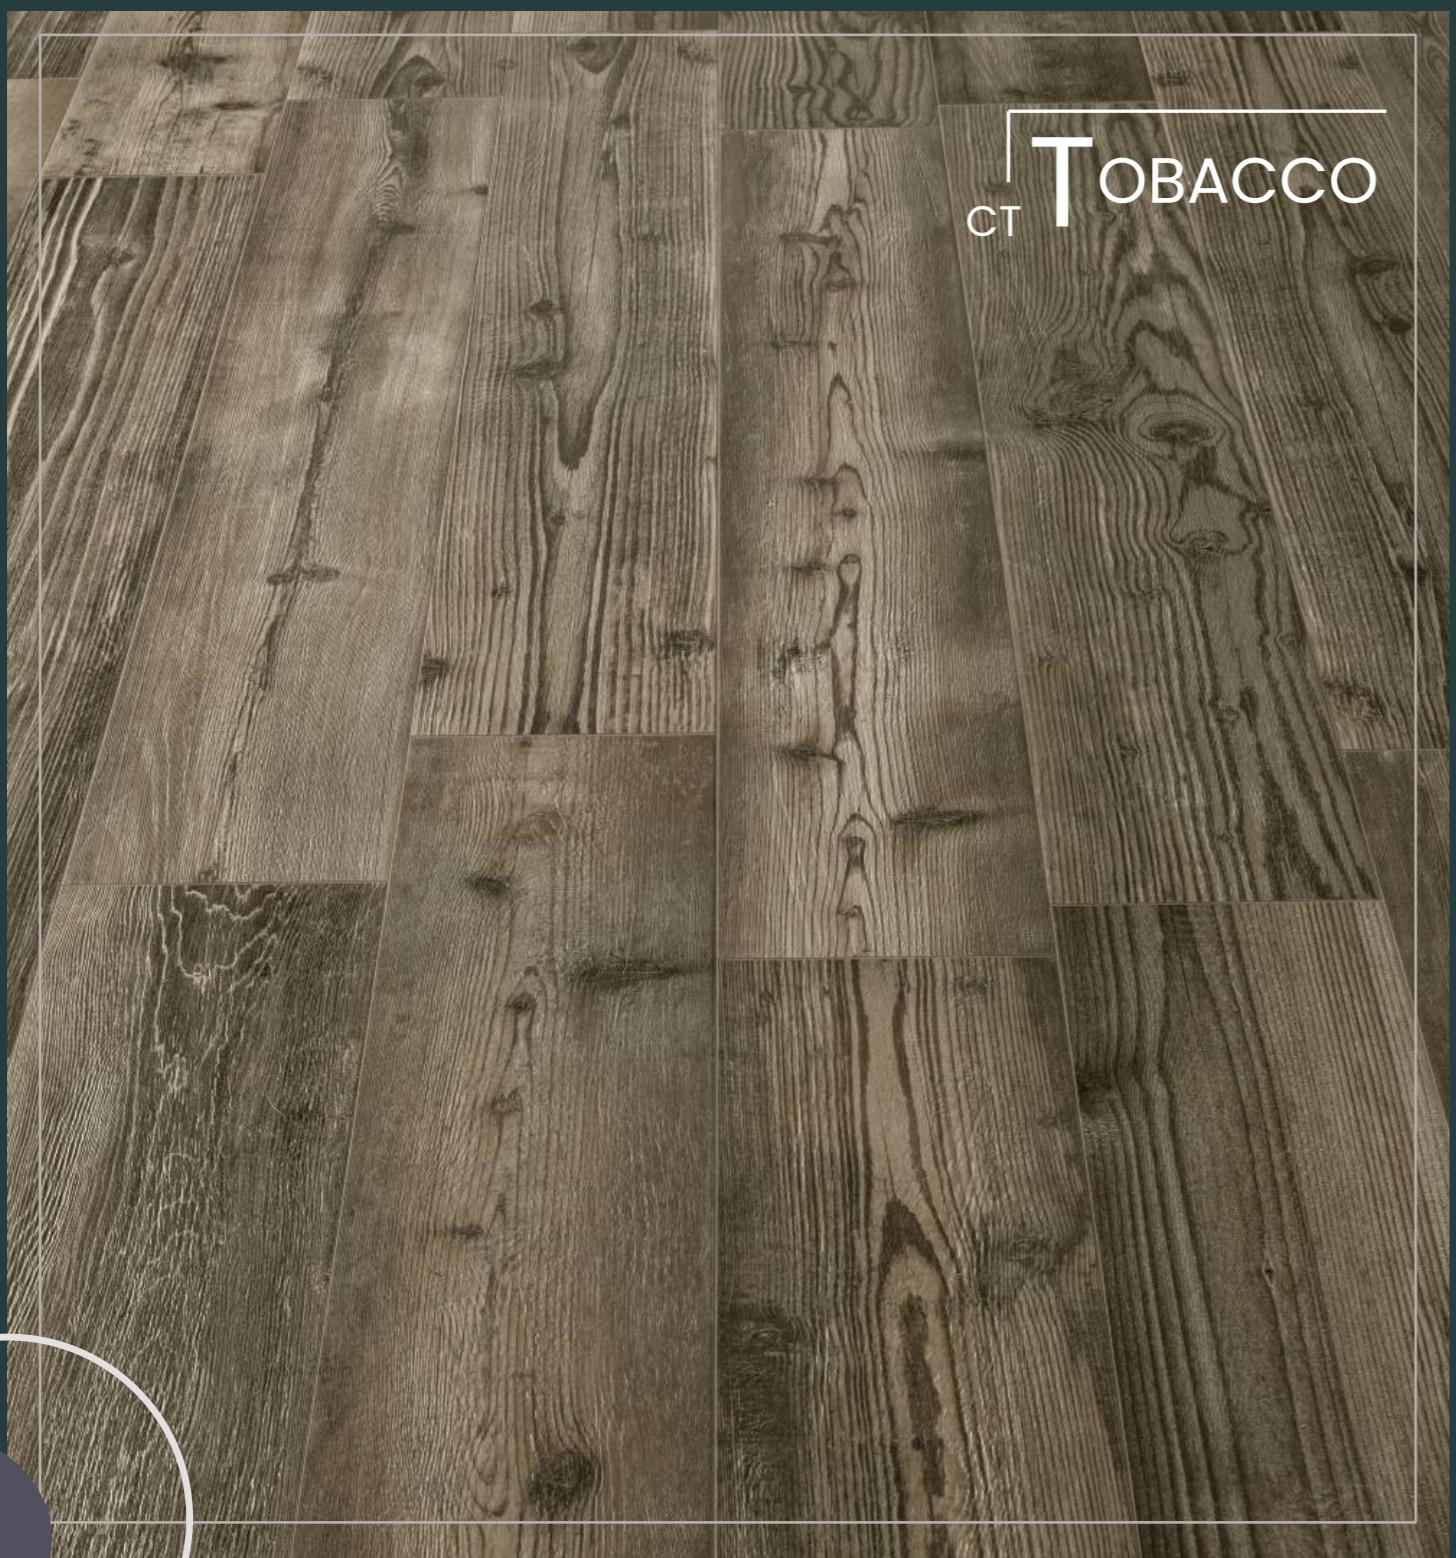

tobacco —0
250 x 1500 nat






tobacco —0
300 x 1200 gr (20mm)

An understated and elegant Brown.



Tactile naturalness

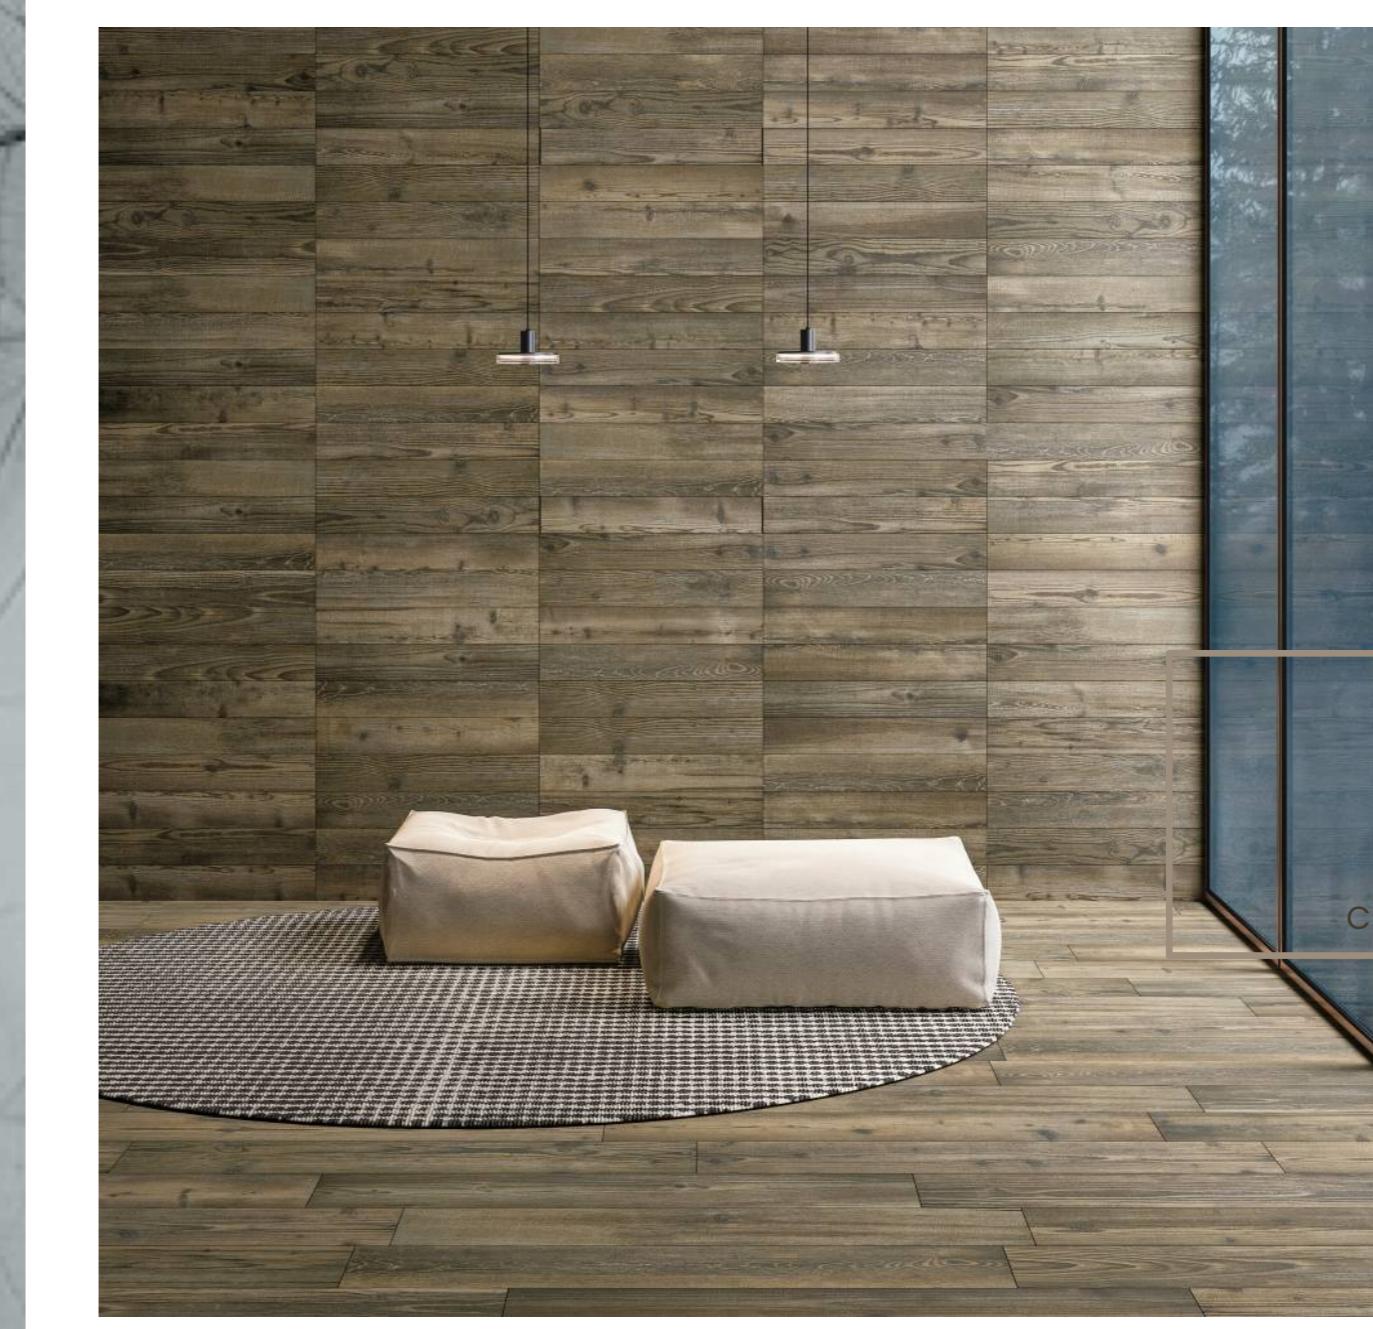


TOBACCO

250 x 1500 mm nat


SIZES & FINISHES




9 mm



natural R10 (nat)

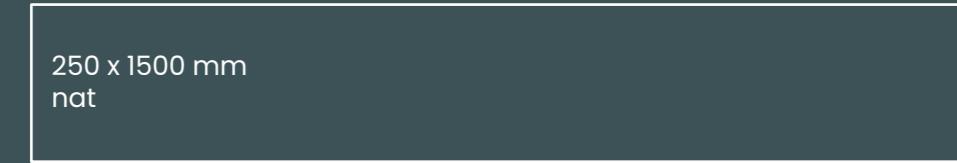

250 x 1500 mm
nat

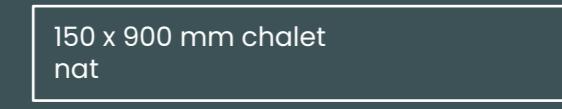

150 x 900 mm chalet
nat



120 x 750 mm chalet
nat



hexagon
250 x 216 mm




herringbone
362 x 412 mm






20 mm



grip R11 (gr)

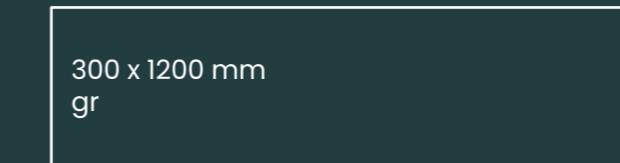


300 x 1200 mm
gr

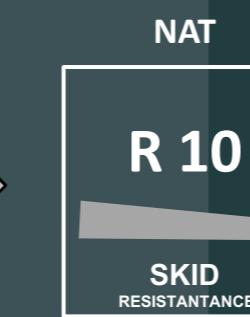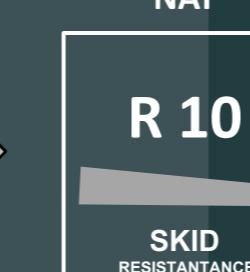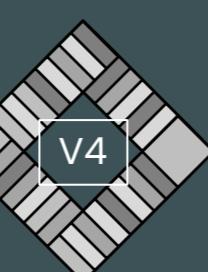

technical characteristics

The marked chromatic variation and the veining of the product is an intrinsic feature to re-create the randomness and richness of the colour shading of natural stones to which the collection is inspired. For these reasons, we recommend installing the product choosing tiles from different boxes in order to guarantee a variable and natural random effect of the finished surface. Due to these intrinsic features of the product, the colours represented in this catalogue must only be considered an example of the many possible colour shades

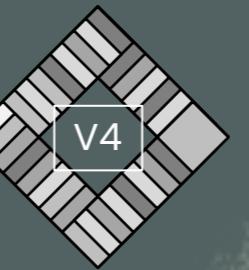

features - nat / gr



class 5




R10 (nat)
R11 (gr)



A+B (nat)
A+B+C (gr 20mm)



≥ 36 wet

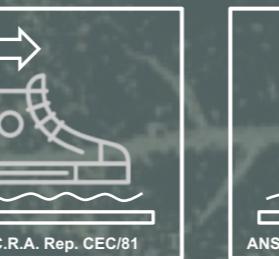

bagnato > 0.40 > 0.42 wet





technical characteristics

Gres Fine Porcellanato – EN 14411 ISO 13006 Gruppo Bla Annex G

		standard	required standards	value
 DIMENSIONS	length & width	EN ISO 10545-2	± 0.3% max 1.0 mm	complying
	thickness	EN ISO 10545-2	± 0.5% max 0.5 mm	complying
	linearity	EN ISO 10545-2	± 0.3% max 0.8 mm	complying
	wedging (according to ISO 13006)	EN ISO 10545-2	± 0.3% max 1.5 mm	complying
	warpage	EN ISO 10545-2	± 0.4% max 1.8 mm	complying

Gres Fine Porcellanato – EN 14411 ISO 13006 Gruppo Bla Annex G

technical characteristics

	standard	required standards	value
 WATER ABSORPTION <small>UNI EN ISO 10545-3</small>	EN ISO 10545-3	$\leq 0.5\%$	$\leq 0.2\%$
 FLEX RESISTANCE <small>UNI EN ISO 10545-4</small>	EN ISO 10545-4	$S \geq 1300 \text{ N}$ (thickness $\geq 7.5 \text{ mm}$) $R \geq 35 \text{ N/mm}^2$	compliant
 COEFFICIENT OF RESTITUTION (COR) <small>UNI EN ISO 10545-5</small>	EN ISO 10545-5	recommended value $\geq 0.55/$	compliant
 DEEP ABRASION RESISTANCE <small>UNI EN ISO 10545-6</small>	EN ISO 10545-6	$\leq 175 \text{ mm}^3$	compliant
 ABRASION RESISTANCE <small>UNI EN ISO 10545-7</small>	EN ISO 10545-7	PEI (only for glazed tiles)	-
 COEFFICIENT OF THERMAL LINEAR EXPANSION <small>UNI EN ISO 10545-8</small>	EN ISO 10545-8	test methods available	$\leq 7 \cdot 10^{-6} \cdot \text{C}^{-1}$
 THERMAL SHOCK RESISTANCE <small>UNI EN ISO 10545-9</small>	EN ISO 10545-9	no sample must show visible defects	compliant
 MOISTURE EXPANSION <small>UNI EN ISO 10545-10</small>	EN ISO 10545-10	test methods available	$\leq 0.01\% \text{ (} 0.1 \text{ mm/m)}$
 FIRE RESISTANCE <small>UNI EN ISO 13501-1</small>	EN ISO 13501-1	declare a value Class A1 or A _{1fl}	A _{1fl}
 FROST RESISTANCE <small>UNI EN ISO 10545-12</small>	EN ISO 10545-12	resistant	compliant



Gres Fine Porcellanato – EN 14411 ISO 13006 Gruppo Bla Annex G

	standard		required standards	value
CHEMICAL RESISTANCE  UNI EN ISO 10545/13	EN ISO 10545-13	resistance to household chemicals and swimming pool salts	minimum Class B (GB for glazed tiles) minimum Class B (UB for unglazed tiles)	A
		resistance to low concentrations of acids and alkalis	declare a class test methods available	LA
		resistance to high concentrations of acids and alkalis	declare a class test methods available	HA
STAIN RESISTANCE  UNI EN ISO 10545/14	EN ISO 10545-14		UGL declare a value GL ≥ 3	Class 5 resistant
LEAD & CADMIUM DISCHARGE  UNI EN ISO 10545/15	EN ISO 1545-15		declared value for GL tiles	-

	standard	required standards	value	
ASSESSMENT OF SLIP RESISTANCE 	DIN 51130		nat	gr
		declare a value (R)	R10	R11
		declare a value (A+B+C)	A+B	A+B+C
	BS7976-2-2002(CEN/TS 16165, Annex C) pendulum friction test	declare a value	≥ 40	≥ 40
MEASUREMENT OF DYNAMIC COEFFICIENT OF FRICTION 	B.C.R.A. Rep. CEC/81	bagnato > 0.40	bagnato > 0.40	bagnato > 0.40
	ANSI A137.1-2012 (BOT3000)	> 0.42 wet	> 0.42 wet	> 0.42 wet

technical characteristics



Stonegres Limited
20-22 Wenlock Road
London
N1 7GU

tel: 020 8943 3154

info@stonegres.co.uk | www.stonegres.co.uk