

Dynamic Elements

limestone effect
SP COLLECTION

NATURE IN HARMONY



CONTEMPORARY TOUCH

Natural elegance without boundaries.

Introducing a stunning collection of agglomerated stone with new and unique finishes, showcasing dynamic light effects. This range blends elements from diverse origins, united by limestone material to create remarkable depth and vigor.

Explore the beauty of unconventional designs and intricate textures in this mesmerizing series.

the
collection

-LIMESTONE *effect*-

▣ BIANCO P.4


▣ BEIGE P.9

▣ GRIGIO P.14


▣ ARGILLA P.18

▣ GRIGIO SCURO P.22


▣ TECHNICAL CHARACTERISTICS P.27




BIANCO SP




BEIGE SP



GRIGIO SP



ARGILLA SP



GRIGIO SCURO SP



FINISHES

R10
R11 (A + B)



THICKNESSES

6 mm
9 mm
20 mm



Bianco

B I A N C O



BIANCO
604 X 1208 NAT



BIANCO
FLOOR 604 X 1208 NAT
WALL 604 x 1208 CR






BIANCO
FLOOR 604 X 1208 NAT
WALL 604 x 1208 CR


BIANCO
WALL 1200 x 2800 NAT (6MM)

BEIGE
FLOOR 604 x 1208 HN






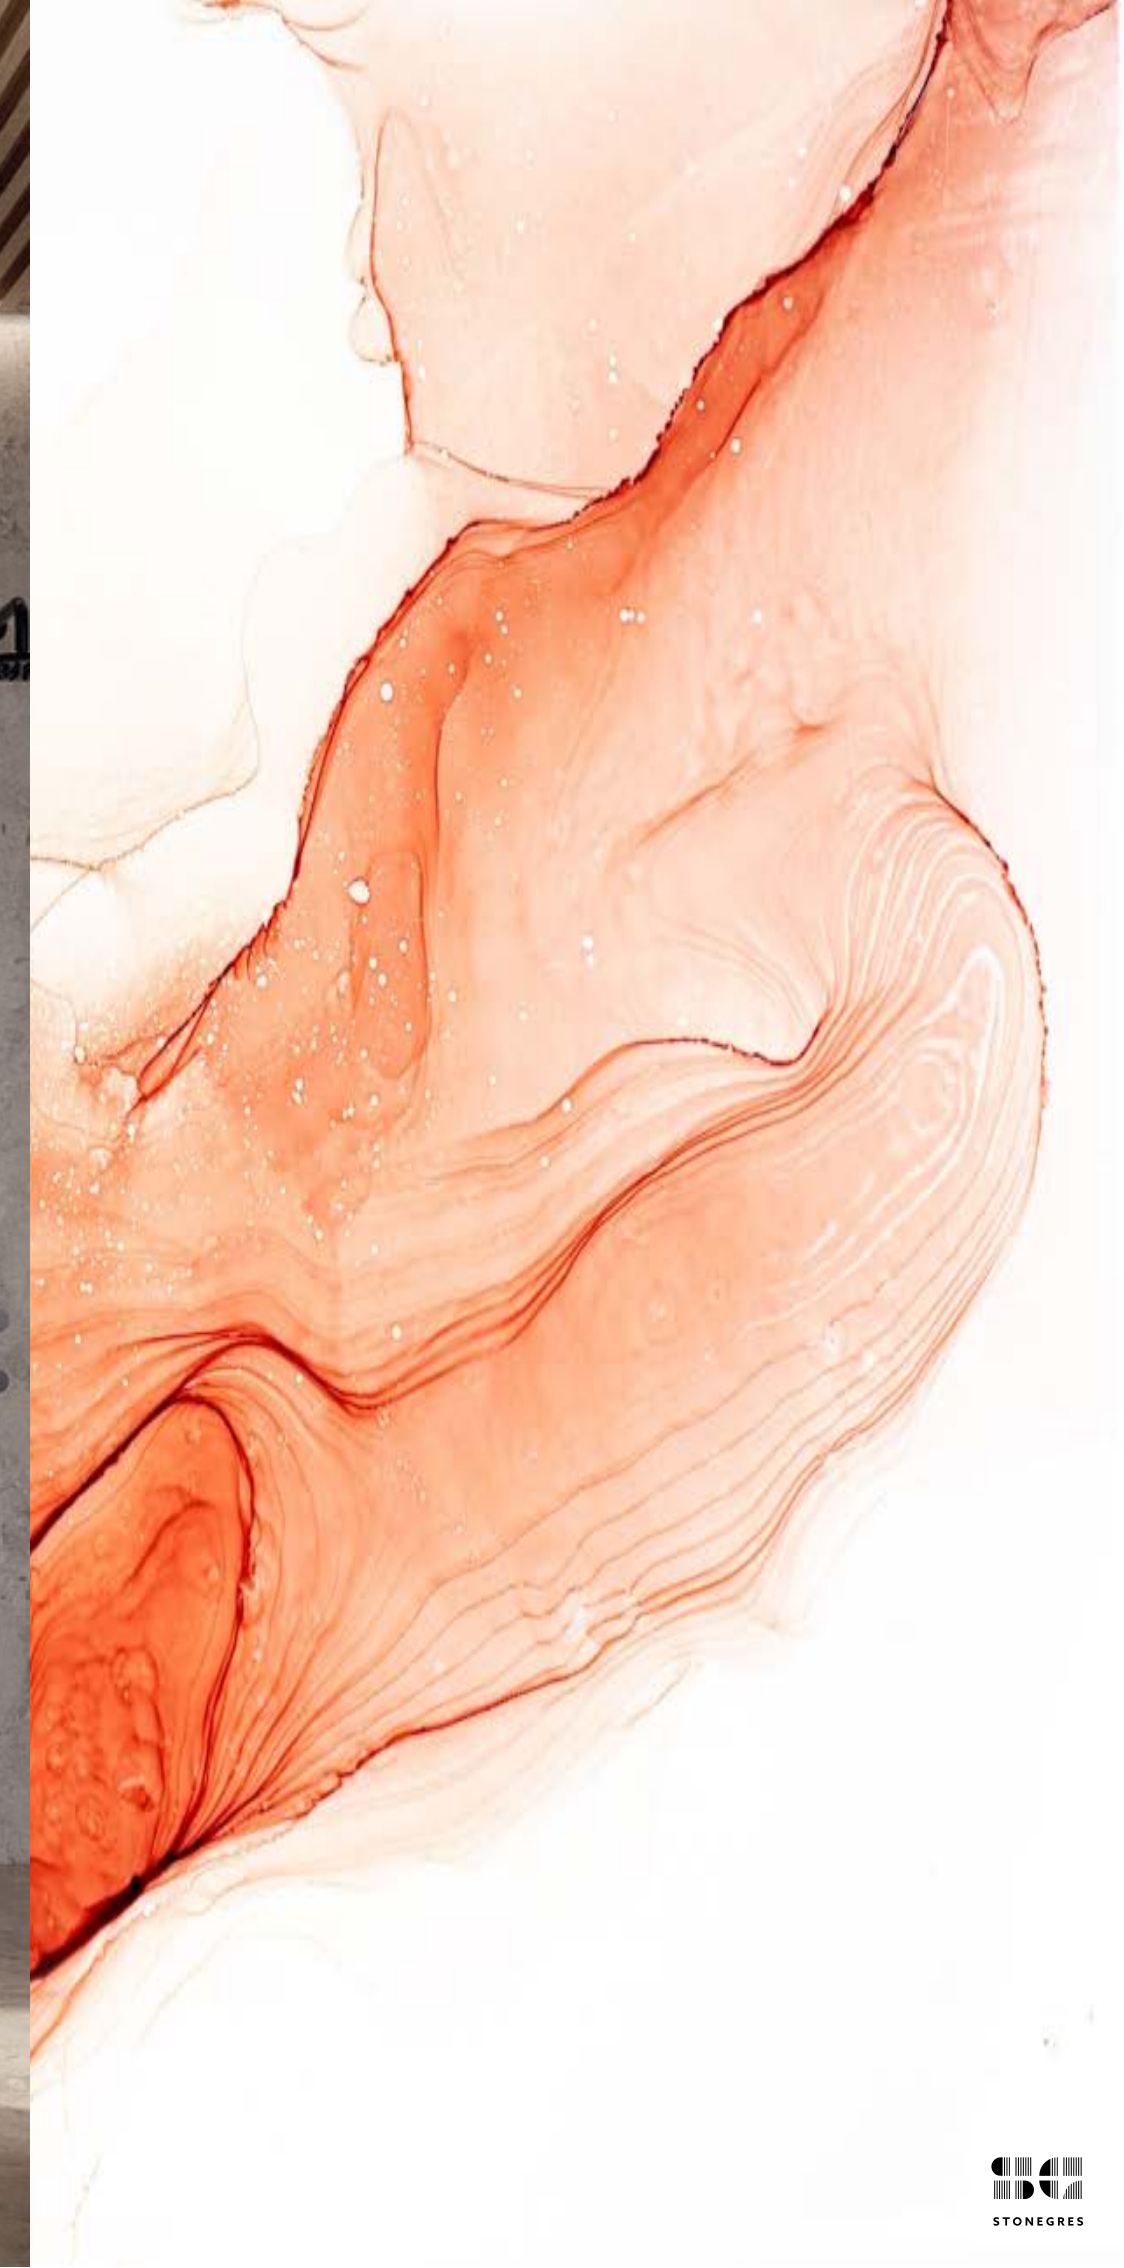




THICKNESSES

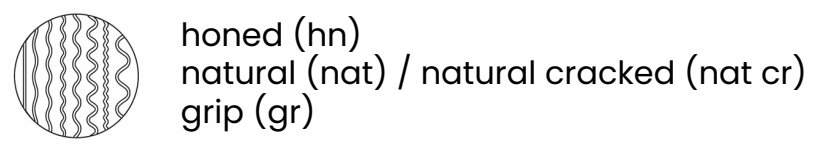

FINISHES

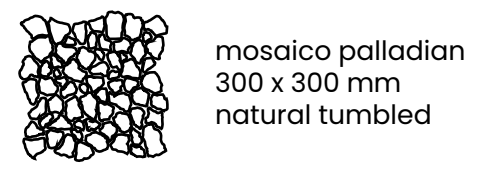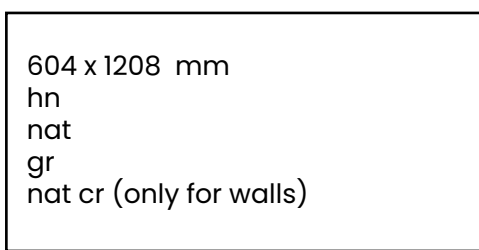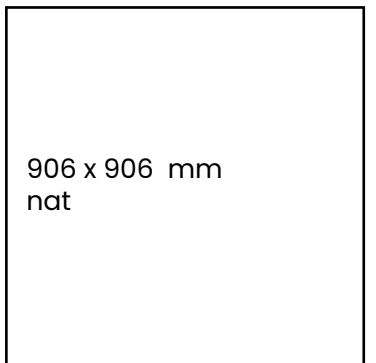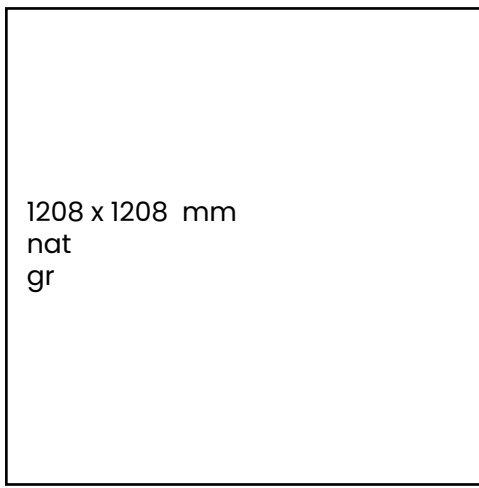





SIZES & finishes



THICKNESSES



FINISHES

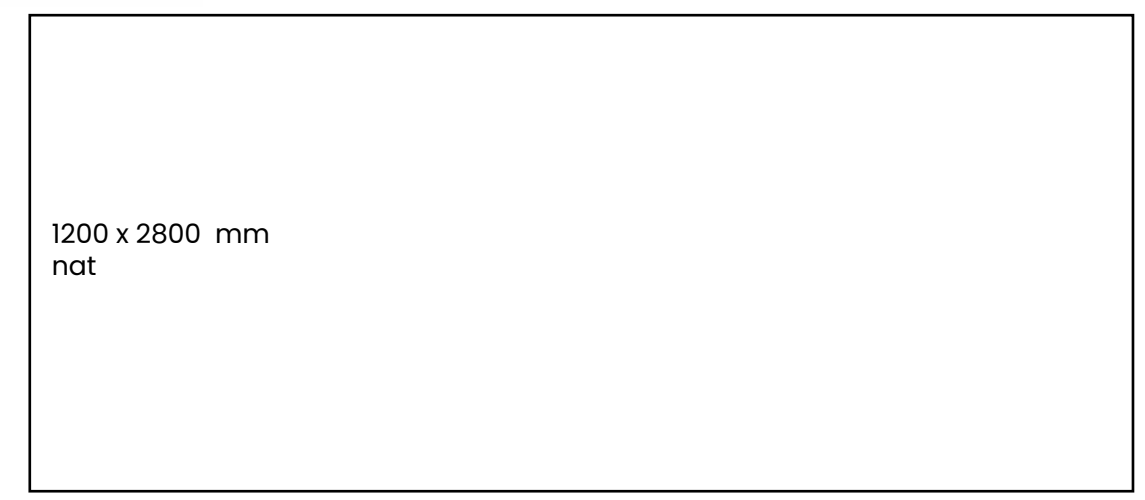




Belle

BELLE

BEIGE
FLOOR 604 X 1208 HN

BIANCO
WALL 1200 x 2800 NAT (6MM)

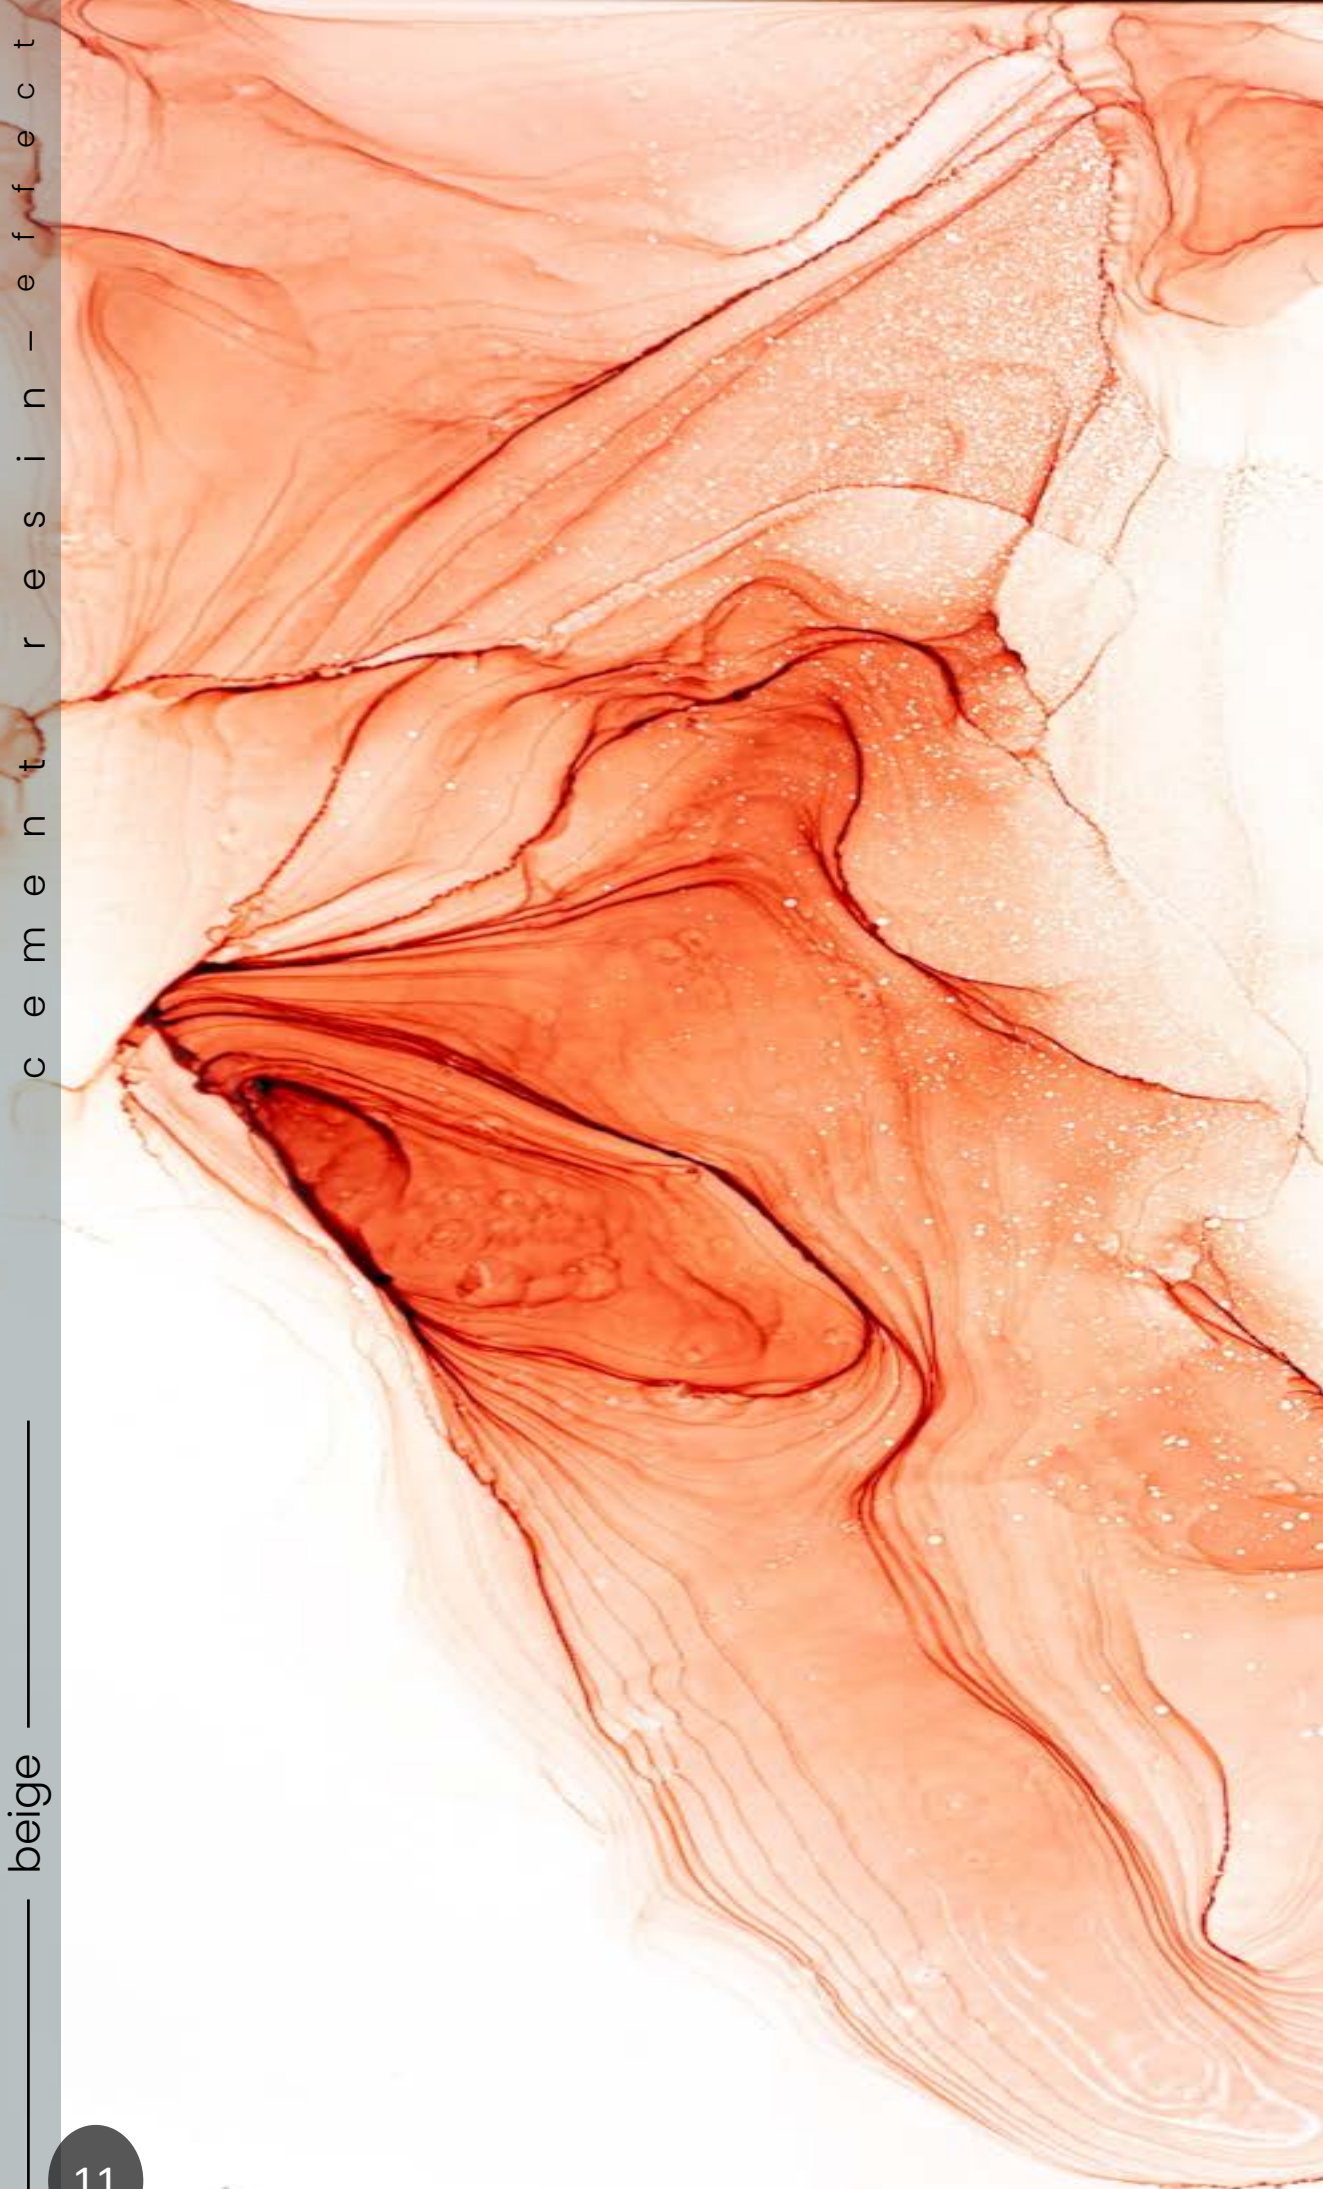

beige

cement resin-effect



BEIGE
FLOOR 1208 X 1208 NAT
WALL 1200 x 2800 NAT (6MM)




BEIGE
FLOOR 1208 X 1208 NAT
WALL 1200 X 2800 NAT (6MM)









9 mm

THICKNESSES



honed (hn)
natural (nat) / natural cracked (nat cr)
grip (gr)

FINISHES

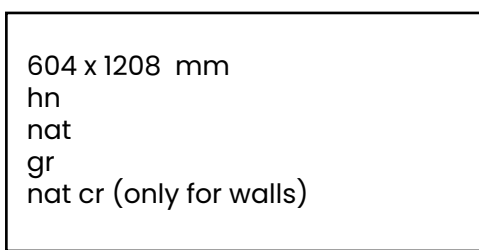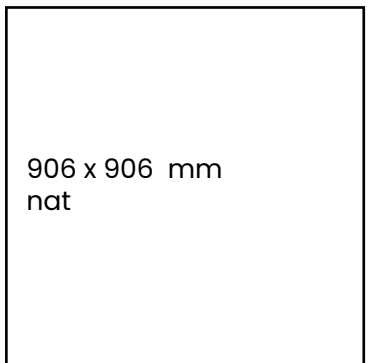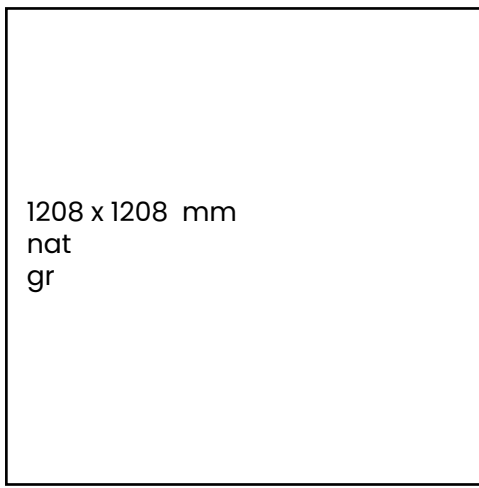


mosaico palladian
300 x 300 mm
natural tumbled




20 mm

THICKNESSES




grip R11 (gr)

FINISHES

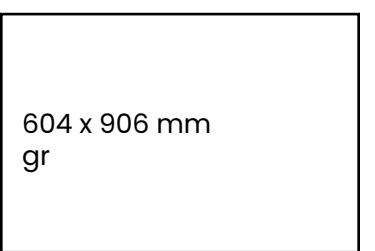

6 mm

THICKNESSES






natural (nat)

FINISHES



SIZES & finishes



A + B

A + B



Griglio


G R I G L I O

GRIGIO
1208 X 1208 NAT






GRIGIO
FLOOR 1208 X 1208 NAT
WALL 1200 X 2800 NAT (6MM)









9 mm

THICKNESSES



honed (hn)
natural (nat) / natural cracked (nat cr)
grip (gr)

FINISHES

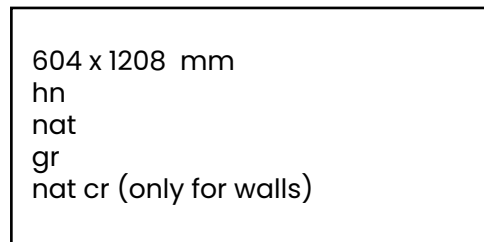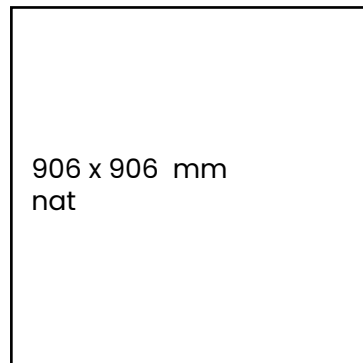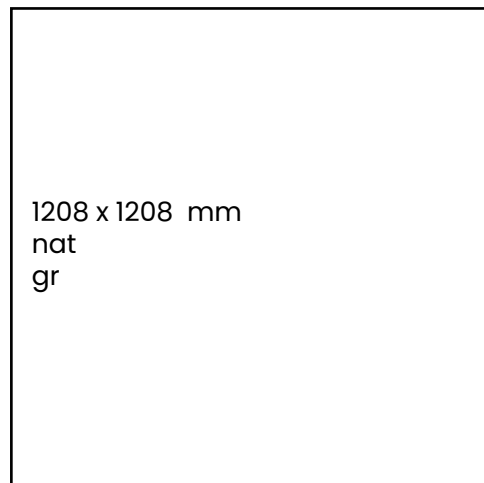


mosaico palladian
300 x 300 mm
natural tumbled





20 mm

THICKNESSES




grip R11 (gr)

FINISHES

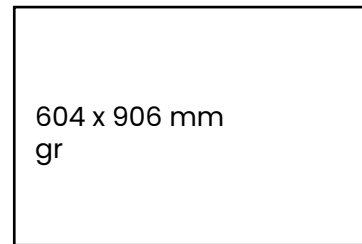

6 mm

THICKNESSES





natural (nat)


FINISHES



SIZES & finishes



A + B



A + B



Argilla


A R G I L L A



ARGILLA
FLOOR 1208 X 1208 NAT
WALL 604 X 1208 CR




ARGILLA
FLOOR 1208 X 1208 NAT
WALL 604 X 1208 CR






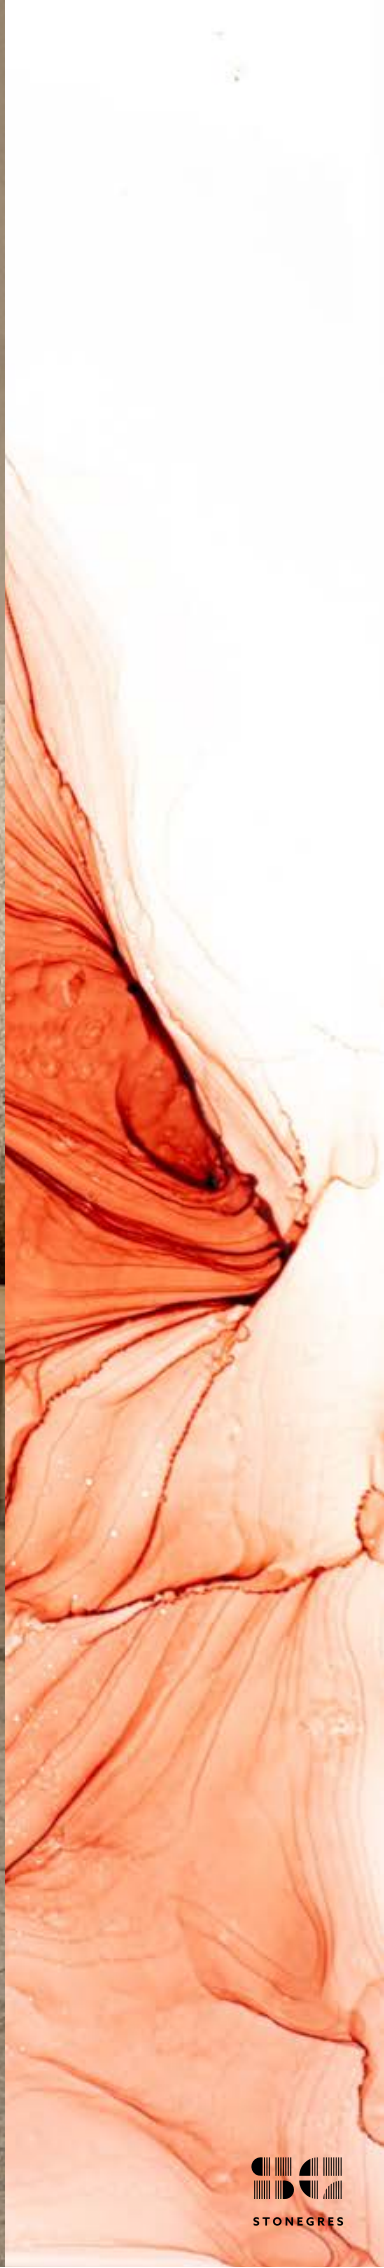







THICKNESSES



FINISHES

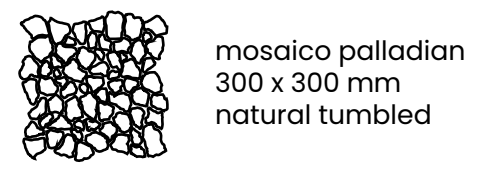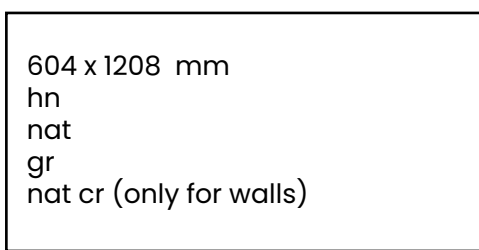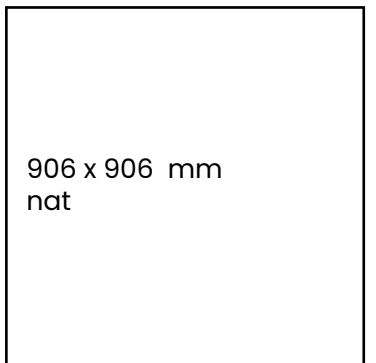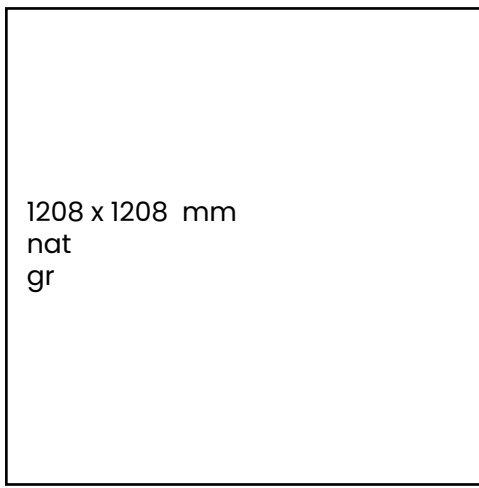


SIZES & finishes



A + B

A + B

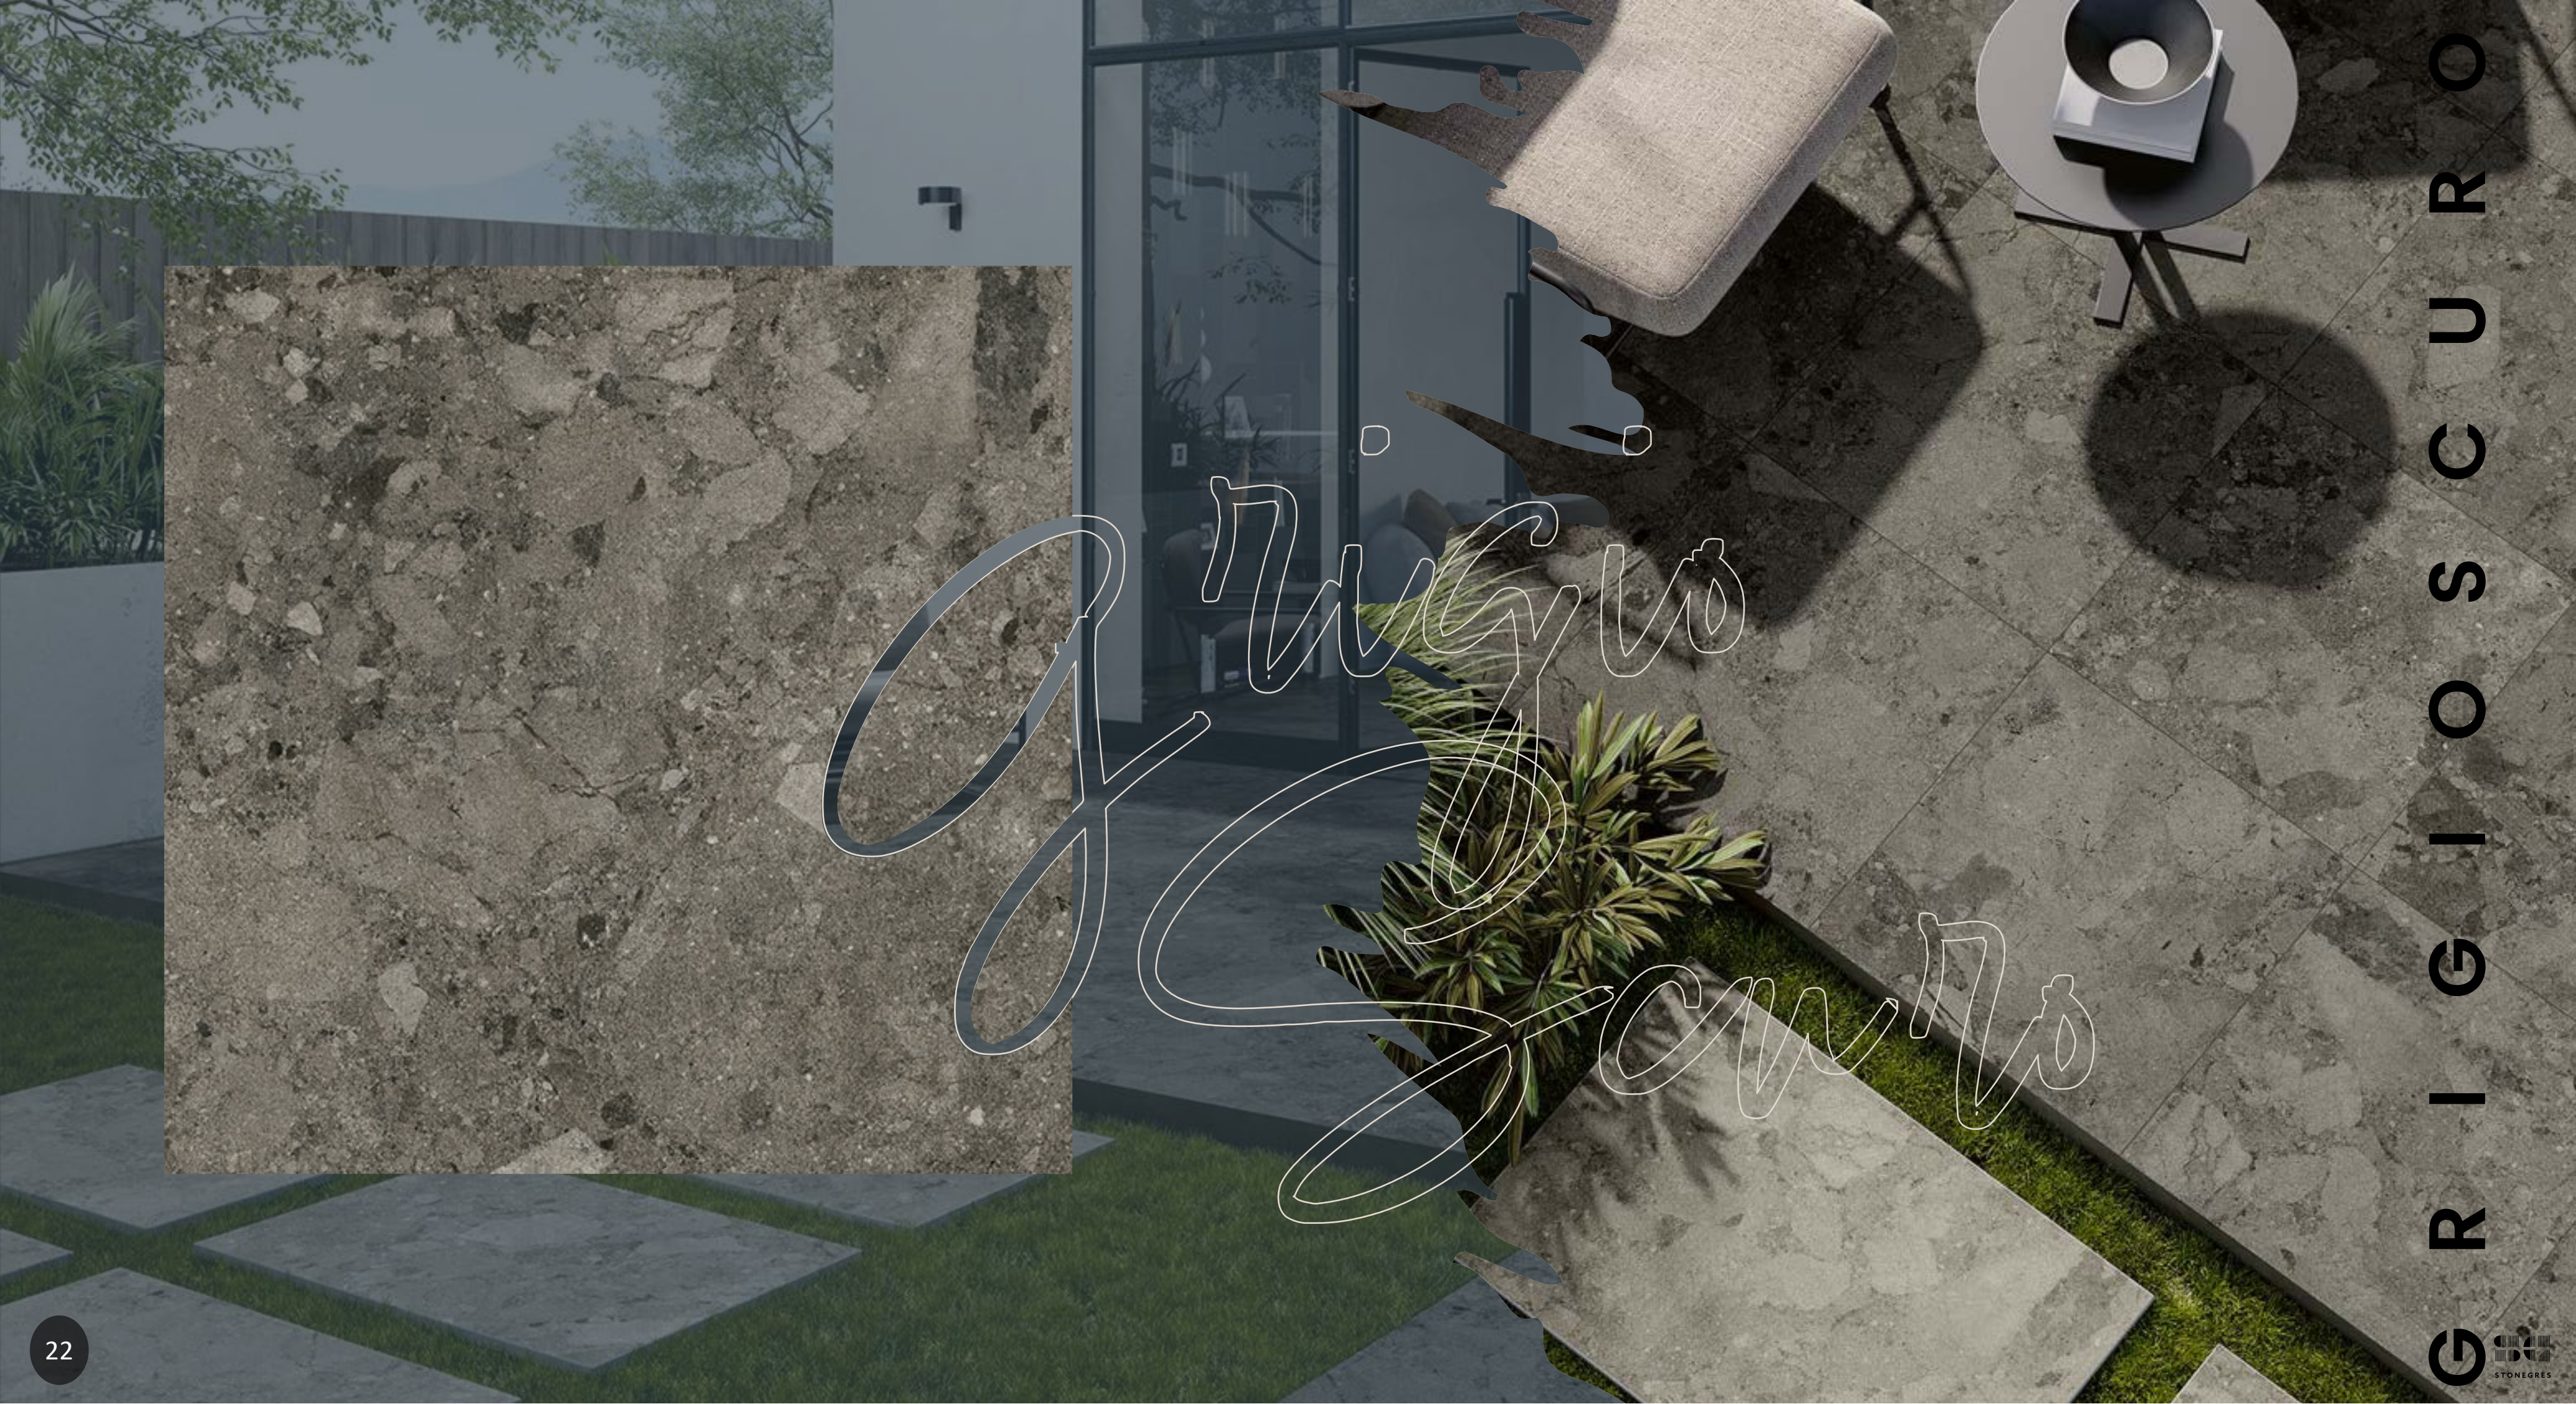

G R I G I O S C U R O





GRIGIO SCURO
OUTDOOR FLOOR 604 X 604 GR
INDOOR FLOOR 604 X 604 NAT

GRIGIO
STEP STONES 604 X 906 GR (20MM)




GRIGIO SCURO
FLOOR 604 X 604 GR

GRIGIO
FLOOR 604 X 906 GR (20MM)



GRIGIO SCURO
FLOOR 1208 X 1208 GR

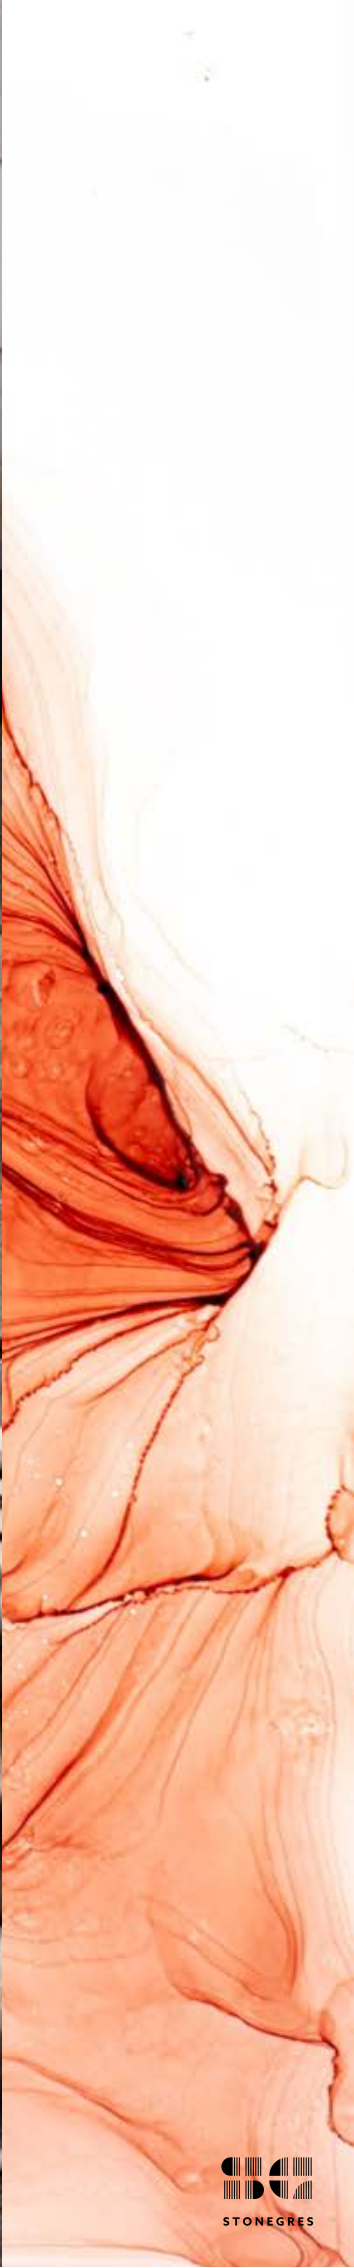




GRIGIO SCURO
FLOOR 1208 X 1208 GR









9 mm

THICKNESSES





honed (hn)
natural (nat) / natural cracked (nat cr)
grip (gr)

FINISHES

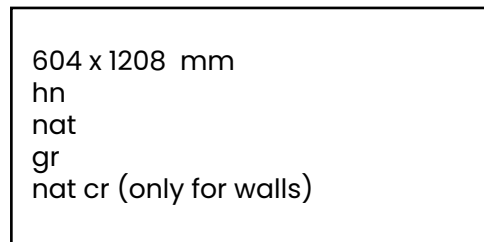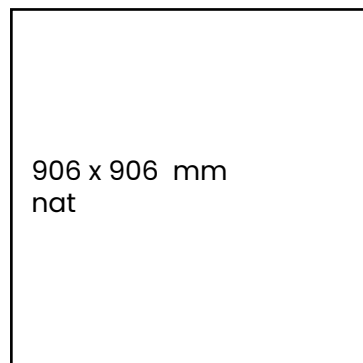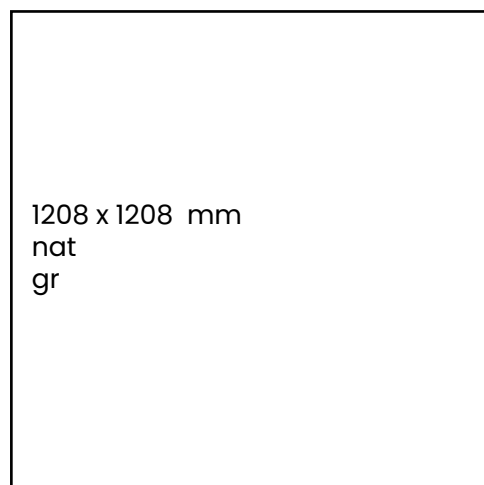


mosaico palladian
300 x 300 mm
natural tumbled

SIZES & finishes



A + B



A + B

SUSTAINABILITY

Certified sustainability

This collection is made with respect for the environment through processes certified in compliance with international standards on quality (UNI EN ISO 9001:2015), environment (ISO 14001:2015 EMAS), and safety (UNI ISO 45001:2018) and according to the "17889-1 Sustainability for Ceramic Tiles" standard, which have obtained the recognition of management excellence from Certiquality.

Energy performance and thermal insulation

This collection guarantees excellent energy performance and good thermal insulation, thanks also to its high refractive index. Due to its technical-structural characteristics and high content of recycled materials, these materials can contribute to a building's LEED® score (Leadership in Energy and Environmental Design).

Made with locally sourced raw materials





Raw materials are sourced from quarries that follow a programme aimed at restoring the landscape and vegetation in line with environmental directives, in order to safeguard the biodiversity of the territory. For this reason, it gives preference to local raw materials within a radius of 800 Km.

High recycled content

This porcelain stoneware is manufactured with a high content of recycled material and industrial waste. 93% of the waste from the production process is recycled internally, and only 7% is recovered from authorised external companies, thus reducing the use of virgin raw materials.

100% recycled packaging



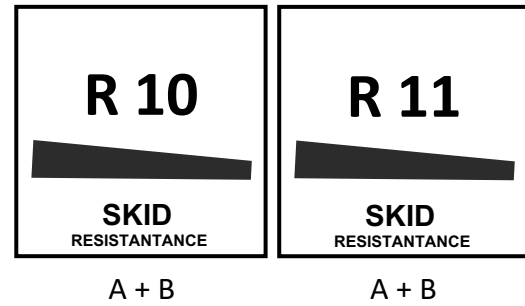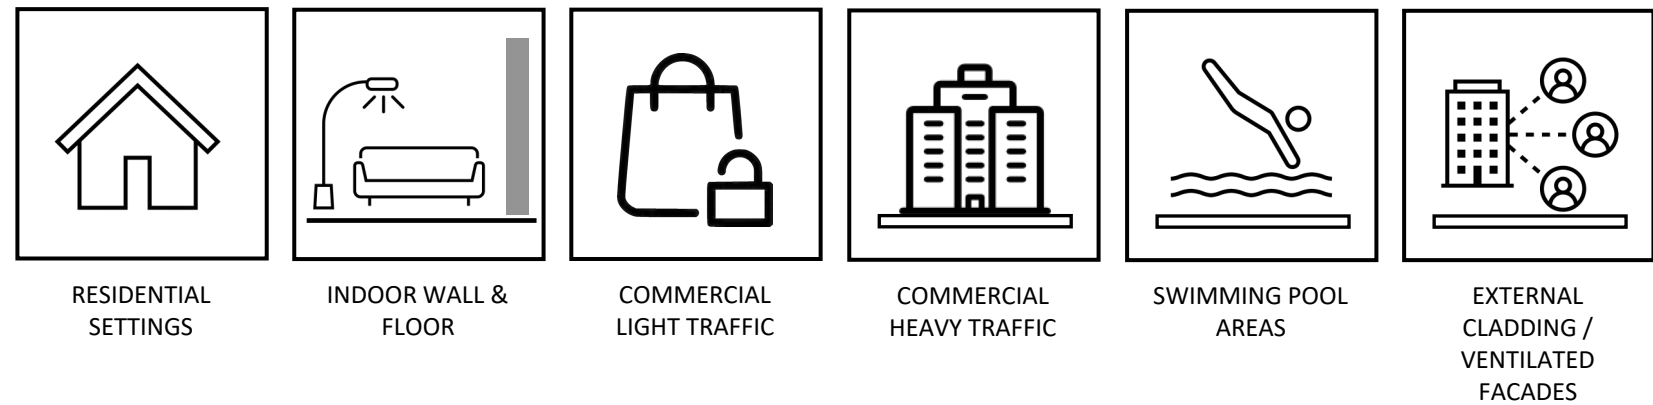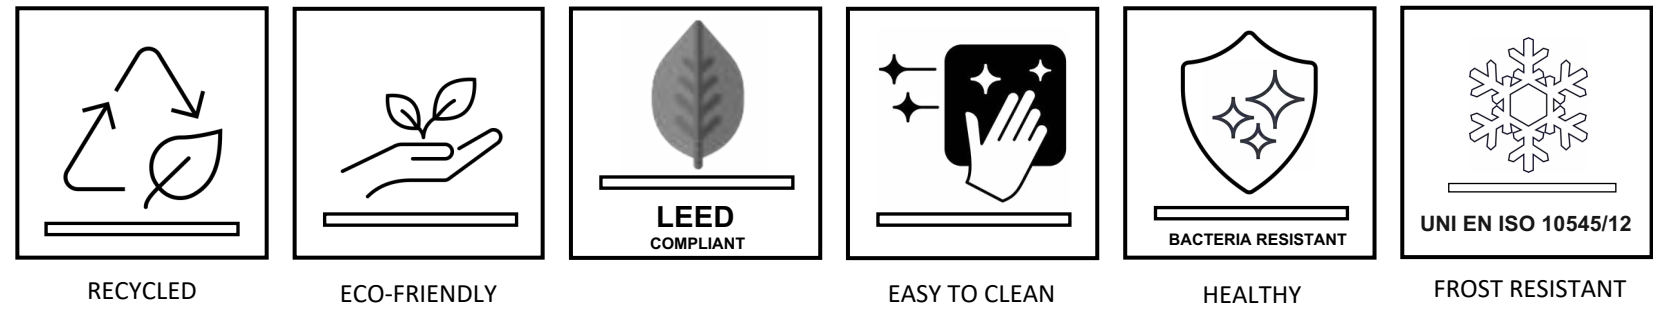




The technology used for packaging makes it possible to reduce cardboard consumption by up to 50%. The packaging of Sassiepierre is made of recycled and fully recyclable material.

















The grip finish comes in all the colours and sizes of the collection, in a thickness of 9mm, except for the 906x906 size, to offer a non-slip surface ideal for creating a seamless continuity with indoor spaces. The 604x906 cm size with a thickness of 20 mm is available in Beige and Grigio for laying directly on grass, gravel or sand, glued on screeds or as a raised floor. It can be combined with formats with a grip finish to guarantee superb technical performance and a natural aesthetic.









Indoor and outdoor environments that blend perfectly together thanks to large-sized slabs and reduced thicknesses. The volumes of rooms change, and the creative narrative expands to create visually uninterrupted surfaces with strong textural impact. The 6 mm slabs are available in the 1200x2800 size in the colours Bianco, Beige and Grigio.



GRES ++	PORCELAIN STONEWARE EN 14411:2012 ANNEX G GROUP BIa UGL	
highly recycled content		LEED® compliant product LEED®
antibacterial protection		patented technology
thickness		9 mm
shade variation		V3 - tiles with moderate shade and aspect variation
applications		indoor walls and floors / outdoor walls and floors (outdoor)
destinations of use		residential areas / commercial - light traffic
		commercial - heavy traffic (unpolished / outdoor)
		swimming pool areas (outdoor)
		external cladding / ventilated facade

GRES ++	PORCELAIN STONEWARE EN 14411:2012 ANNEX G GROUP B1a UGL	
ISO 10545-12		frost resistant
B.C.R.A.		natural grip dry: > 0.40 wet: > 0.40
STANDARD B5 16165:2021 ANNEX C PENDULUM TESTERS		natural dry: 50 wet: 40
DIN EN 16165:2021 ANNEX B DIN EN 16165:2021 ANNEX A		natural R10 A+B
DIN EN 16165:2021 ANNEX B DIN EN 16165:2021 ANNEX A		grip R11 A+B
DCOF AcuTest SM ANSI A326.3		natural wet: ≥ 0.42 grip wet: ≥ 0.55

WIDEgres 6mm	PORCELAIN STONEWARE EN 14411:2012 ANNEX G GROUP BIa UGL	
thickness		6 mm
shade variation		V3 - tiles with moderate shade and aspect variation
applications		indoor walls and floors / external cladding
destinations of use	 <small>RESIDENTIAL SETTING</small>	residential areas / commercial - light traffic
	 <small>COMMERCIAL HEAVY TRAFFIC</small>	commercial - heavy traffic (unpolished / outdoor)
	 <small>EXTERNAL CLADDING / VENTILATED FACADE</small>	external cladding / ventilated facade
ISO 10545-12	 <small>UNI EN ISO 10545/12</small>	frost resistant
B.C.R.A.		natural grip dry: > 0.40 wet: > 0.40
DIN EN 16165:2021 ANNEX B		R9
DCOF AcuTest SM ANSI A326.3		wet: ≥ 0.42

20 mm	PORCELAIN STONEWARE EN 14411:2012 ANNEX G GROUP BIa UGL	
highly recycled content		LEED® compliant product LEED®
thickness		20 mm
shade variation		tiles with moderate shade and aspect variation
applications		outdoor floors
destinations of use	 <small>RESIDENTIAL SETTINGS</small>	residential areas / commercial - light traffic
	 <small>COMMERCIAL HEAVY TRAFFIC</small>	commercial - heavy traffic (unpolished / outdoor)
	 <small>SWIMMING POOL AREAS</small>	swimming pool areas (outdoor)
ISO 10545-12	 <small>UNI EN ISO 10545/12</small>	frost resistant
B.C.R.A.	 BCRA	dry: > 0.40 wet: > 0.40
DIN EN 16165:2021 ANNEX B DIN EN 16165:2021 ANNEX A	 NAT R 10 SKID A+B	R11 A+B

limestone effect
SP COLLECTION

NATURE IN HARMONY



STONEGRES

Stonegres Limited
20-22 Wenlock Road
London
N1 7GU
tel: 020 8943 3154

info@stonegres.co.uk | www.stonegres.co.uk