
Desire Symplicity

TFCOLLECTION NATURE IN HARMONY





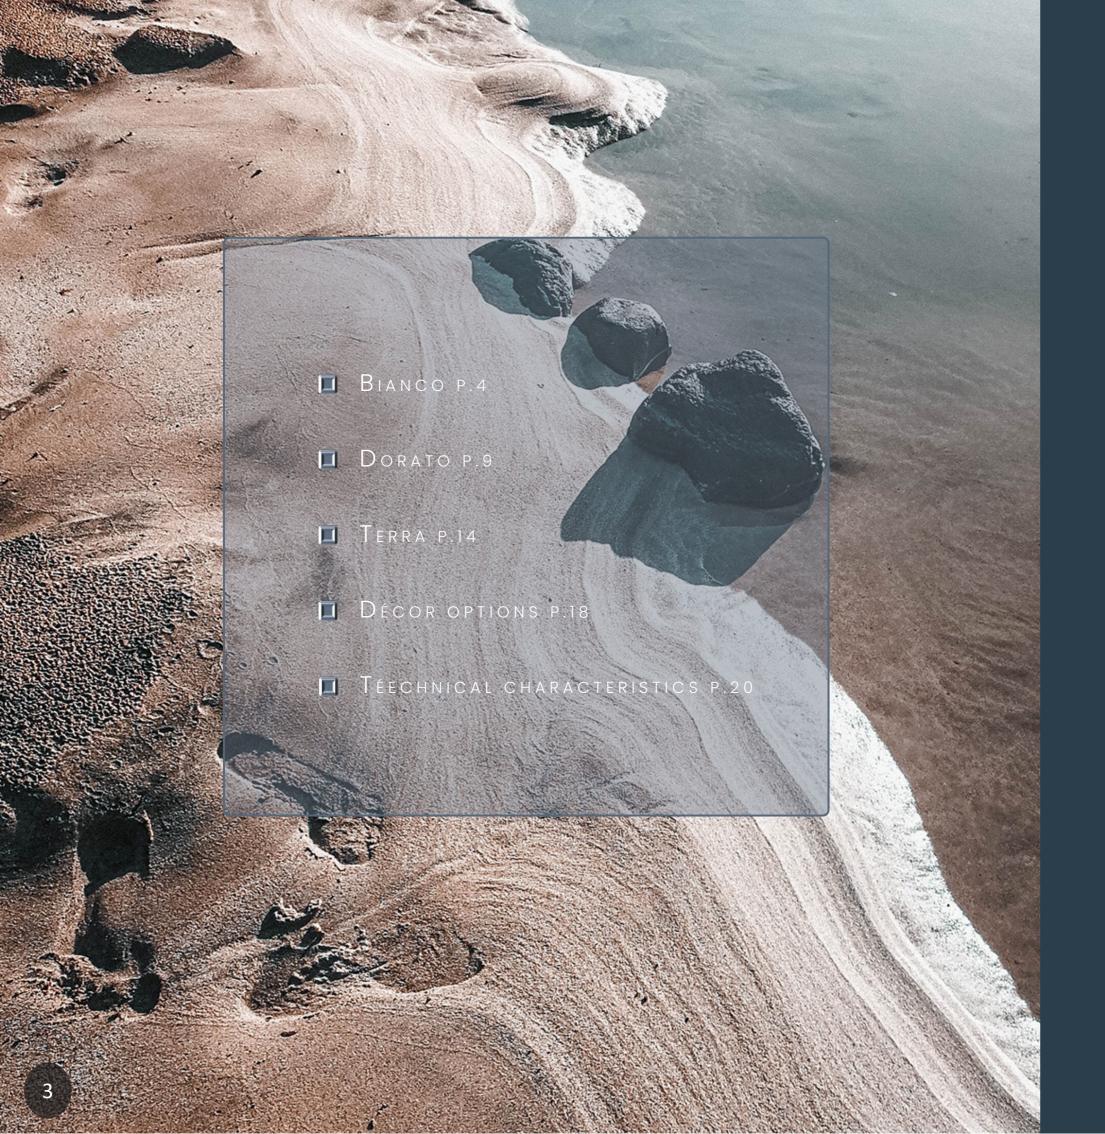

the collection

-LIMESTONE effect-







DORATO TF

TERRA TF





9 mm 20 mm







By embracing nature's balance, we find endless inspiration. Let's prioritize the harmony between humanity and our environment.



BIANCO 604 X 906 GR (20MM)

- e f f e c t
























604 x 906 mm nat


gr






9 mm

THICKNESSES



module 408 x 614 mm | 408 x 408 mm | 203 x 408 mm | 203x203 mm







20 mm



grip R11 (gr)

604 x 906 mm gr




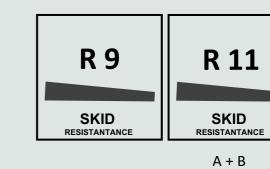

SIZES & finishes





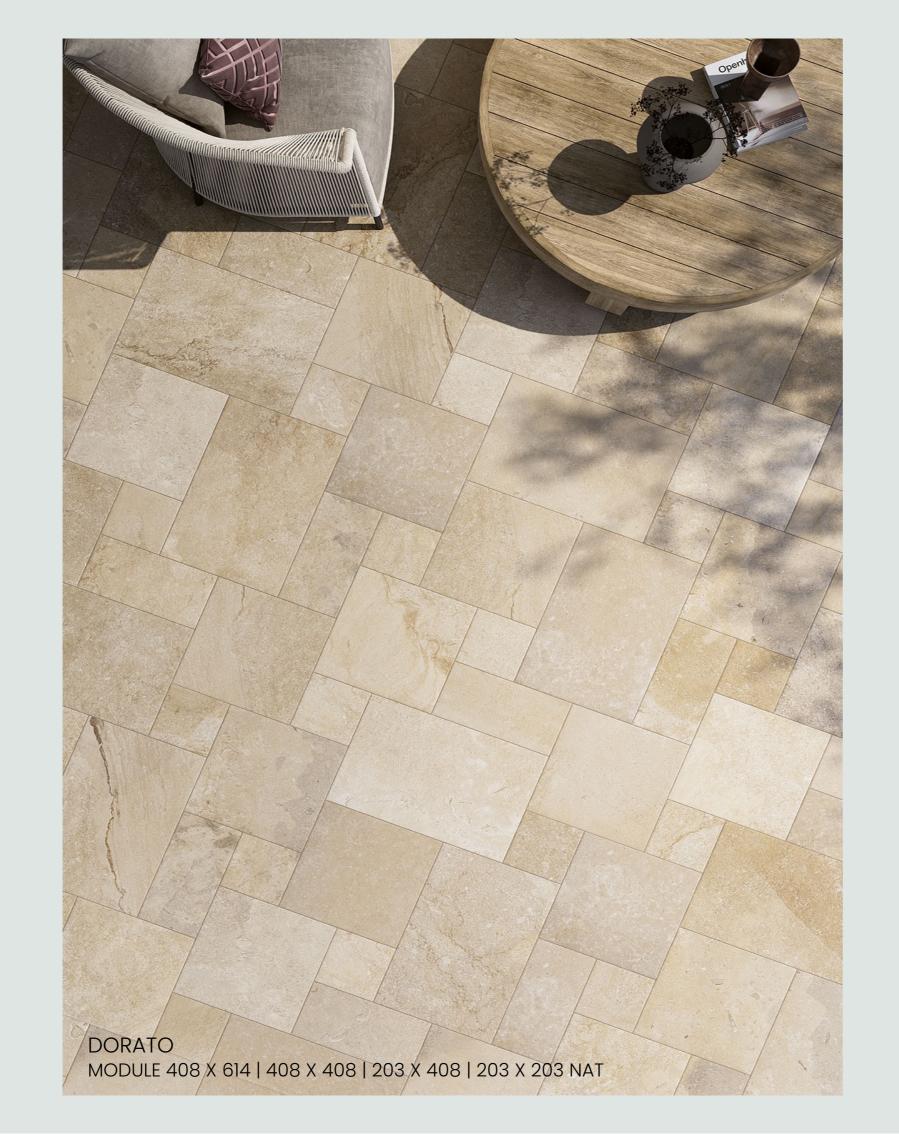





DORATO FLOOR 604 X 906 NAT esin-effect

THICKNESSES




nat(nat) grip (gr)

FINISHE

604 x 906 mm nat gr

408 x 614 mm nat gr



module 408 x 614 mm | 408 x 408 mm | 203 x 408 mm | 203x203 mm nat gr



mosaico 302 x 302 mm nat gr



20 mm

THICKNESSES



grip R11 (gr)

NISHES

604 x 906 mm gr

V4







This collection is ideal for outdoor swimming pools and other outdoor spaces. For these specific uses, it features an "anti-slip A+B" surface, in addition to the standard indoor version.

The grip finish is available in all the colours and sizes of the collection to offer an anti-slip surface that seamlessly blends with indoor spaces.

The 604 x 906 mm size is also available in a thickness of 20 mm for direct laying on grass, gravel, sand or for raised and screed applications, ensuring both aesthetic consistency and high technical performance.



TERRA 604 X 906 NAT 9 mm


THICKNESSES

esin-effect



604 x 906 mm nat gr

408 x 614 mm nat



module 408 x 614 mm | 408 x 408 mm | 203 x 408 mm | 203x203 mm



mosaico 302 x 302 mm nat gr




20 mm



grip R11 (gr)


604 x 906 mm gr

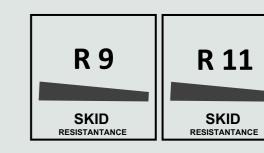

DÉCOR OPTIONS



MOSAICO 302 x302 sheets made up of 36 pieces

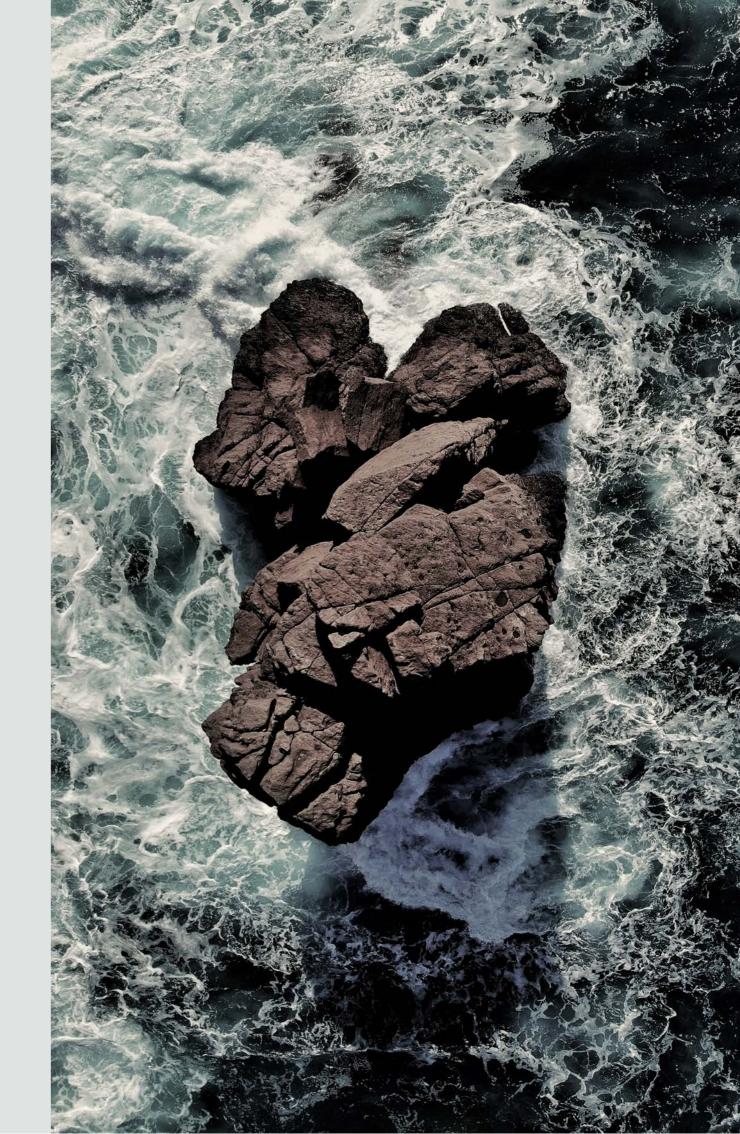

SUSTAINABILITY

Certified sustainability

This collection is made with respect for the environment through processes certified in compliance with international standards on quality (UNI EN ISO 9001:2015), environment (ISO 1400:2015 EMAS), and safety (UNI ISO 45001:2018) and according to the "17889-1 Sustainability for Ceramic Tiles" standard, which have obtained the recognition of management excellence from Certiquality.

Energy performance and thermal insulation


This collection guarantees excellent energy performance and good thermal insulation, thanks also to its high refractive index. Due to its technical-structural characteristics and high content of recycled materials, these materials can contribute to a building's LEED score (Leadership in Energy and Environmental Design).

Made with locally sourced raw materials

Raw materials are sourced from quarries that follow a programme aimed at restoring the landscape and vegetation in line with environmental directives, in order to safeguard the biodiversity of the territory. For this reason, it gives preference to local raw materials within a radius of 800 Km.

High recycled content


This porcelain stoneware is manufactured with a high content of recycled material and industrial waste. 93% of the waste from the production process is recycled internally, and only 7% is recovered from authorised external companies, thus reducing the use of virgin raw materials.

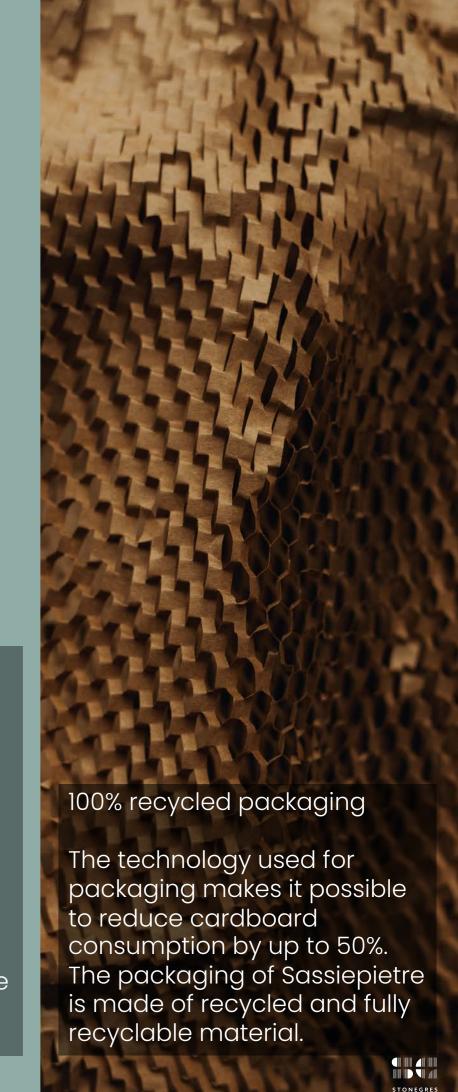














RECYCLED

ECO-FRIENDLY

EASY TO CLEAN







INDOOR WALL & FLOOR




COMMERCIAL LIGHT TRAFFIC




COMMERCIAL HEAVY TRAFFIC



SWIMMING POOL AREAS



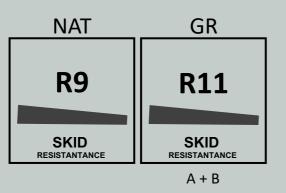



GRES	PORCELAIN STONEWARE EN 14411:2012 ANNEX G GROUP Bla UGL	
highly recycled content		LEED® compliant product LEED®
thickness		9 mm
shade variation	Value of the second of the sec	V4 - tiles with random shade and aspect variation
applications		outdoor floors
destinations of use	MISSENTIAL SETTINGS	residential areas / commercial - light traffic
	COMMERCIA HEAVY TRAFFIC	commercial - heavy traffic (unpolished / outdoor)
	SWIMMING FOOLAREAS	swimming pool areas (outdoor)

20 mm	PORCELAIN STONEWARE EN 14411:2012 ANNEX G GROUP Bla UGL	
highly recycled content		LEED® compliant product LEED®
thickness		20 mm
shade variation		V4 - tiles with random shade and aspect variation
applications		outdoor floors
destinations of use	MESIGENIAL SETTINGS	residential areas / commercial - light traffic
	COMMERCIA HEAVY TRAFFIC	commercial - heavy traffic (unpolished / outdoor)
	SWIMMING POOLAREAS	swimming pool areas (outdoor)

	PORCELAIN STONEWARE EN 14411:2012 ANNEX G GROUP Bla UGL	
ISO 10545-12	UNI EN ISO 10545/12	frost resistant
B.C.R.A.	BCRA	natural grip dry: > 0.40 wet: > 0.40
DIN 51130	R 9 SKID metatratomet	natural R9
DIN 51130 DIN 51097	GR R 11 SKID settlement seet: A + B	grip R11 A+B
DCOF AcuTest SM ANSI A326.3	DCOF	natural wet: ≥ 0.42 grip wet: ≥ 0.55

TFCOLLECTION NATURE IN HARMONY



Stonegres Limited
20-22 Wenlock Road
London
N1 7GU
tel: 020 8943 3154
info@stonegres.co.uk | www.stonegres.co.uk